


Magnochem – Standardised Chemical Pump with Magnetic Coupling



Magnochem – Standardised Chemical Pump with Magnetic Coupling

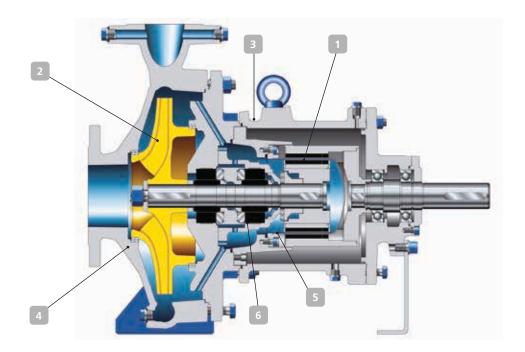

- 1 Further development of the tried and tested mag-drive pump
 - Optimised modular system for magnetic couplings
 - Multiple patents pending
- 2 Expanded performance range
 - New sizes (a total of 58 hydraulic system sizes)
 - Expanded temperature range
 - New operating modes
 - Suitable for new applications
- 3 Broad range of variants for excellent flexibility
 - Wide range of technical design options
 - Modular design system able to match every customer requirement
- 4 Excellent energy efficiency
 - Modern, energy-efficient design
 - Optimised hydraulic system
 - Ceramic loss-free containment shroud as standard

- 5 Maximum operating reliability and environmental acceptability
 - optional DLC-coated plain bearings made of silicon carbide with optimised dry-running properties
 - No more than two static seals required
 - Optional leakage barrier
- 6 High availability and low operating costs
 - Reduction in required stock levels
 - Improved mean time between failures
- KSB as competent and experienced partner

 Comprehensive product portfolio for conventionally sealed pumps, mag-drive and canned motor pumps

Technical data	50 Hz	60 Hz
Flow rate up to	1160 m³/h	1400 m³/h
Head up to	162 m	233 m
Fluid temperature	-90 °C to +300 °C	
Operating pressure up to	40 bar	40 bar

