

High-Pressure Pumps in Ring-Section Design



Automation products available:

- PumpExpert
- PumpDrive
- Hyamaster

Applications

- General water supply
- Pressure boosting
- Drinking water supply
- Irrigation
- Heating
- Boiler feed water
- Warm water
- Hot water
- Circulation
- Condensate
- Snow-making systems
- Distillate
- Industry
- Filter systems
- Solvents
- Fire-fighting systems
- Washing systems
- Reverse osmosis
- Lubricants
- Fuels
- Process
- Power plants

Operating data

Pump sizes	DN 32 to 150
Capacities	Q up to 850 m ³ /h, 236 l/s
Heads	H up to 630 m, (800 m)
Operating temperature	t -10 °C to +200 °C
Operating pressures	p ₂ up to 63 bar ¹⁾ , (80 bar)
Standard flanges	DIN
Suction nozzle	PN 16 (JL1040) and PN 25 (GP240GH+N, 1.4408, 1.4517)
Discharge nozzle	PN 40 (JL1040) and PN 63 (GP240GH+N, 1.4408, 1.4517) Drilled to PN 100 (1.4317, 1.4517)
Standard flanges	ASME
Suction nozzle	Class 125 (JL1040) and Class 300 (GP240GH+N, 1.4408, 1.4517)
Discharge nozzle	Class 250 (JL1040) and Class 600 (GP240GH+N, 1.4408, 1.4317, 1.4517)

1) The total of inlet pressure and head at zero flow must not exceed the specified value

Design

Multistage centrifugal pump in ring-section design, long-coupled (baseplate-mounted) or close-coupled for horizontal installation, close-coupled or with cardan shaft for vertical installation. Axial or radial suction nozzle. Radial suction and discharge casings: Nozzles can be turned in steps of 90°. Flanges to EN and ANSI (holes and flange facing). Closed radial impellers. Size 50 and above: suction impeller in the first stage for improving the NPSH value.


Bearings/Lubrication

Discharge side: rolling element bearings
Suction side: plain or rolling element bearings, depending on installation type
Lubrication: Rolling element bearings grease lubricated, oil lubrication possible. Plain bearings are product lubricated.

Shaft seal

Standardised mechanical seal, uncooled or cooled, single or double. Cartridge mechanical seals possible. Uncooled gland packing, with or without barrier fluid.

Designation

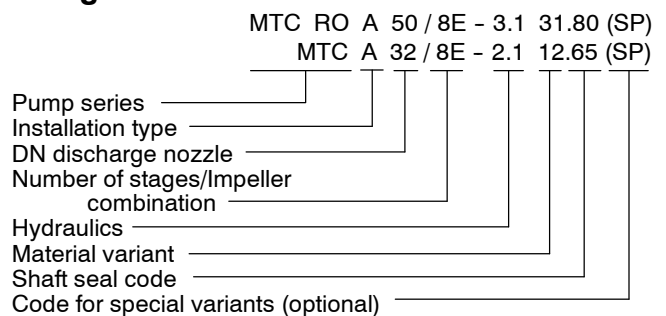

Materials

Casing: Grey cast iron, steel, stainless steel, duplex stainless steel
Hydraulic components: Grey cast iron, bronze, stainless steel, duplex stainless steel

Drive


Electric motor 50 and 60 Hz;
Diesel engine or turbine possible.

Certification

ISO 9001
ISO 14001
ISO 18001


Selection charts

n = 2900 rpm

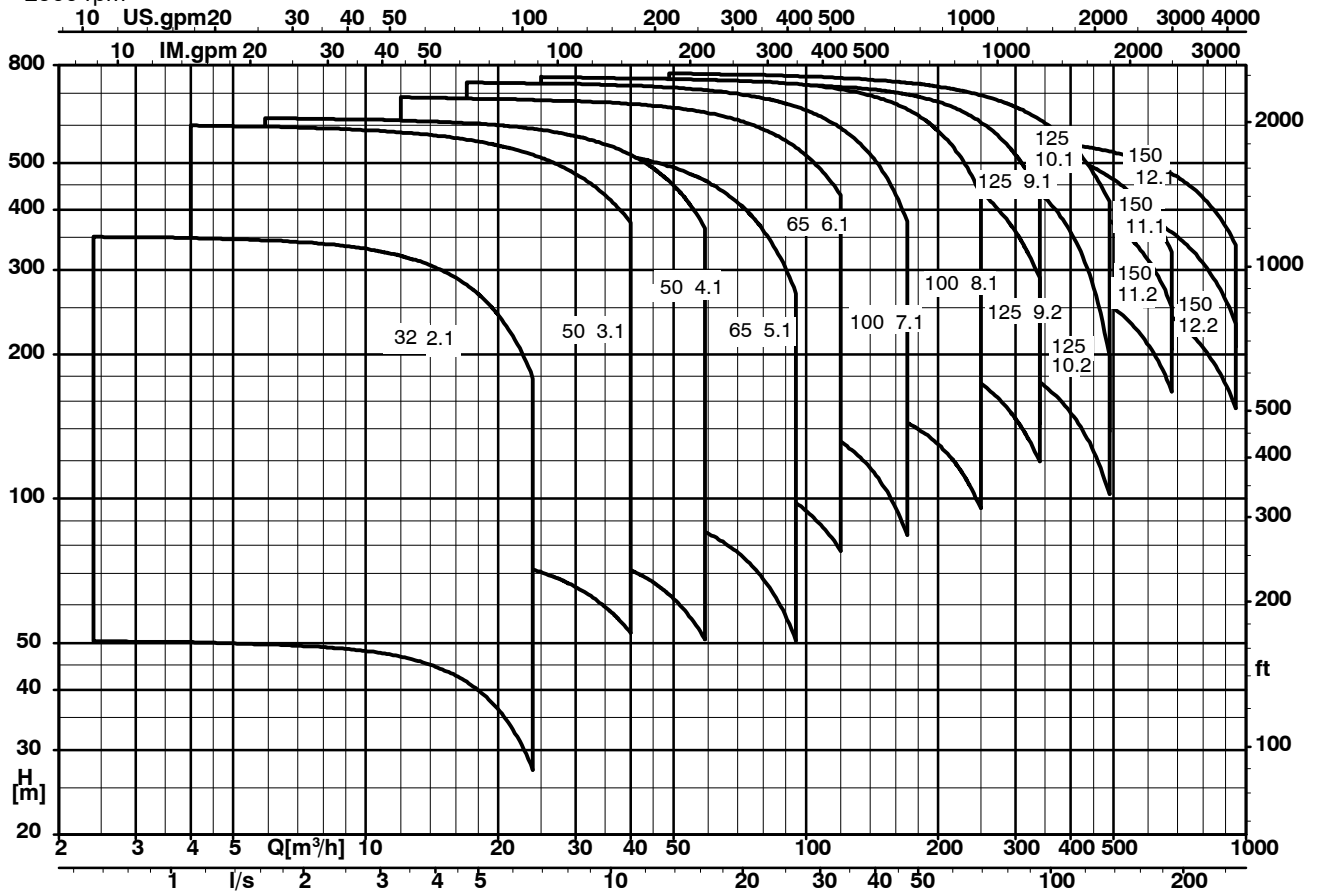


KE1777.ES.S.452/2

n = 3500 rpm

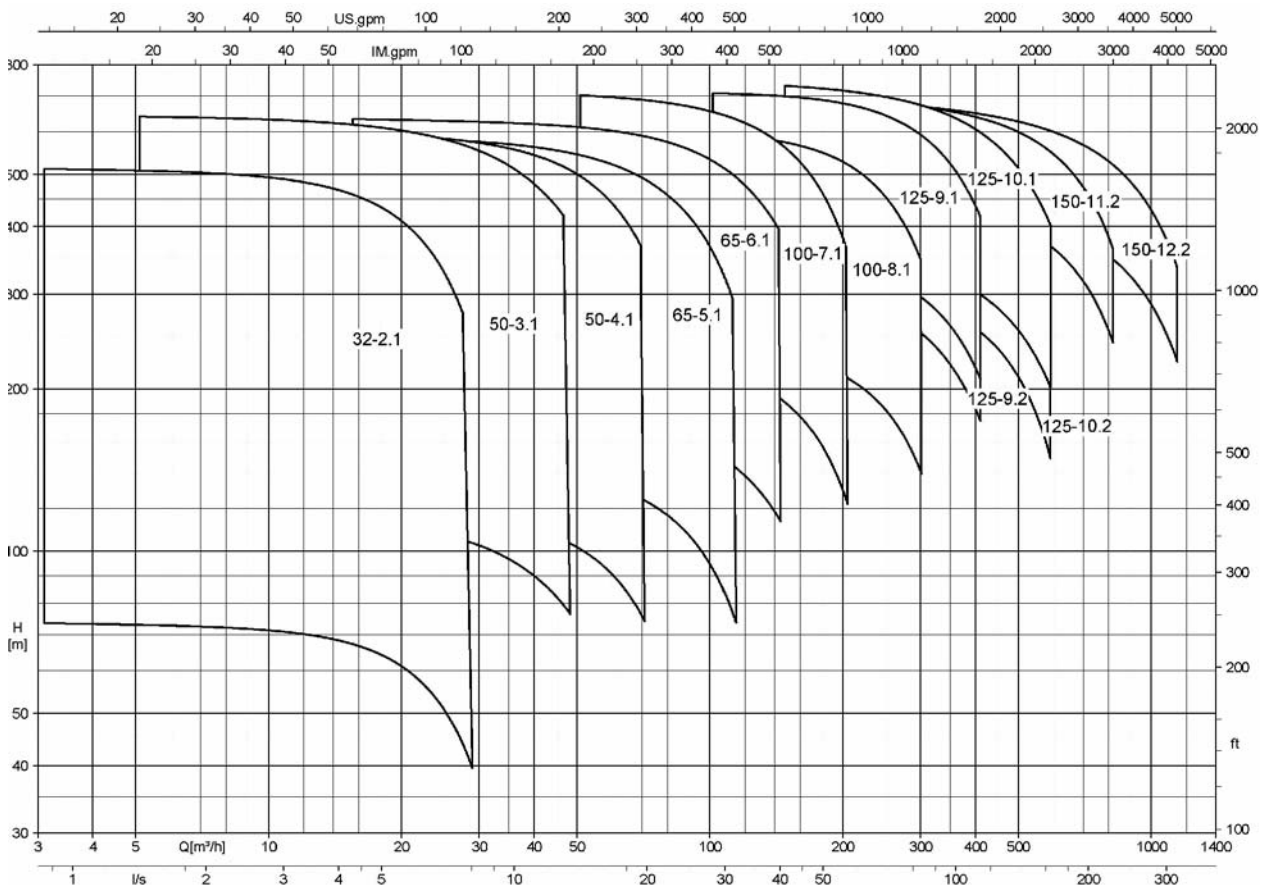


Multitec C 3500/1


n = 1450 rpm

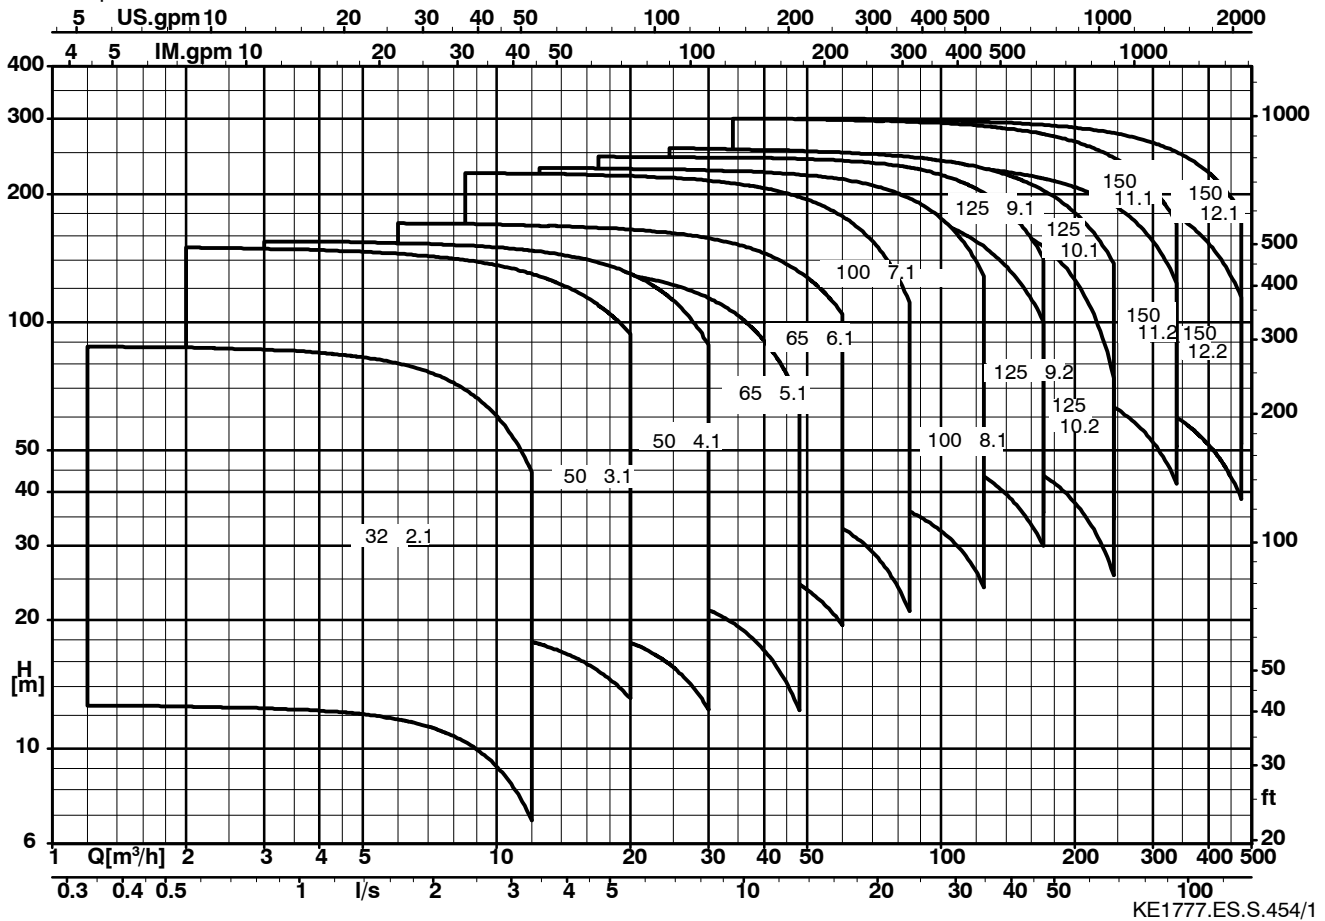

n = 1750 rpm







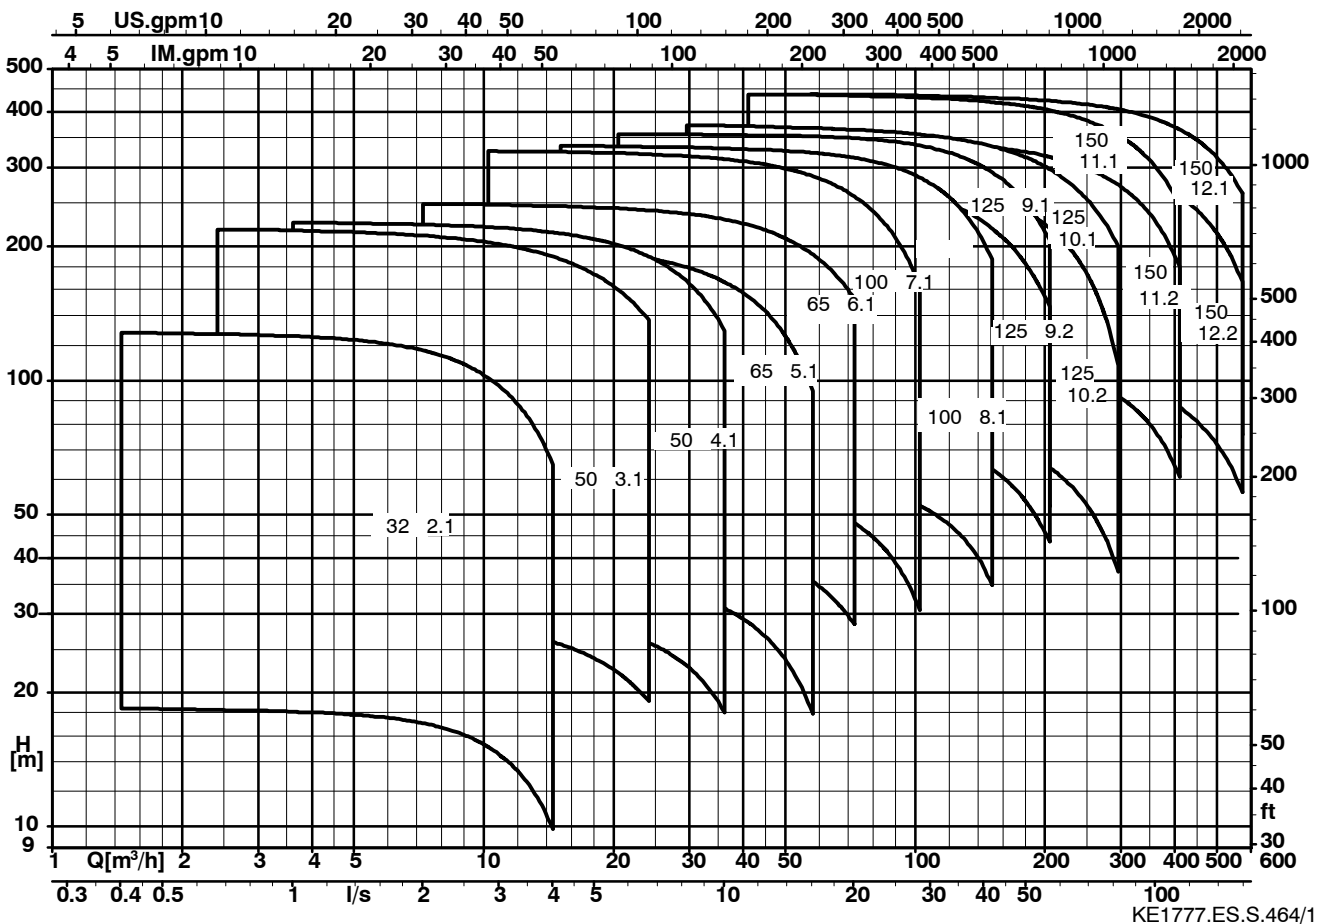


Operating ranges depending on installation type

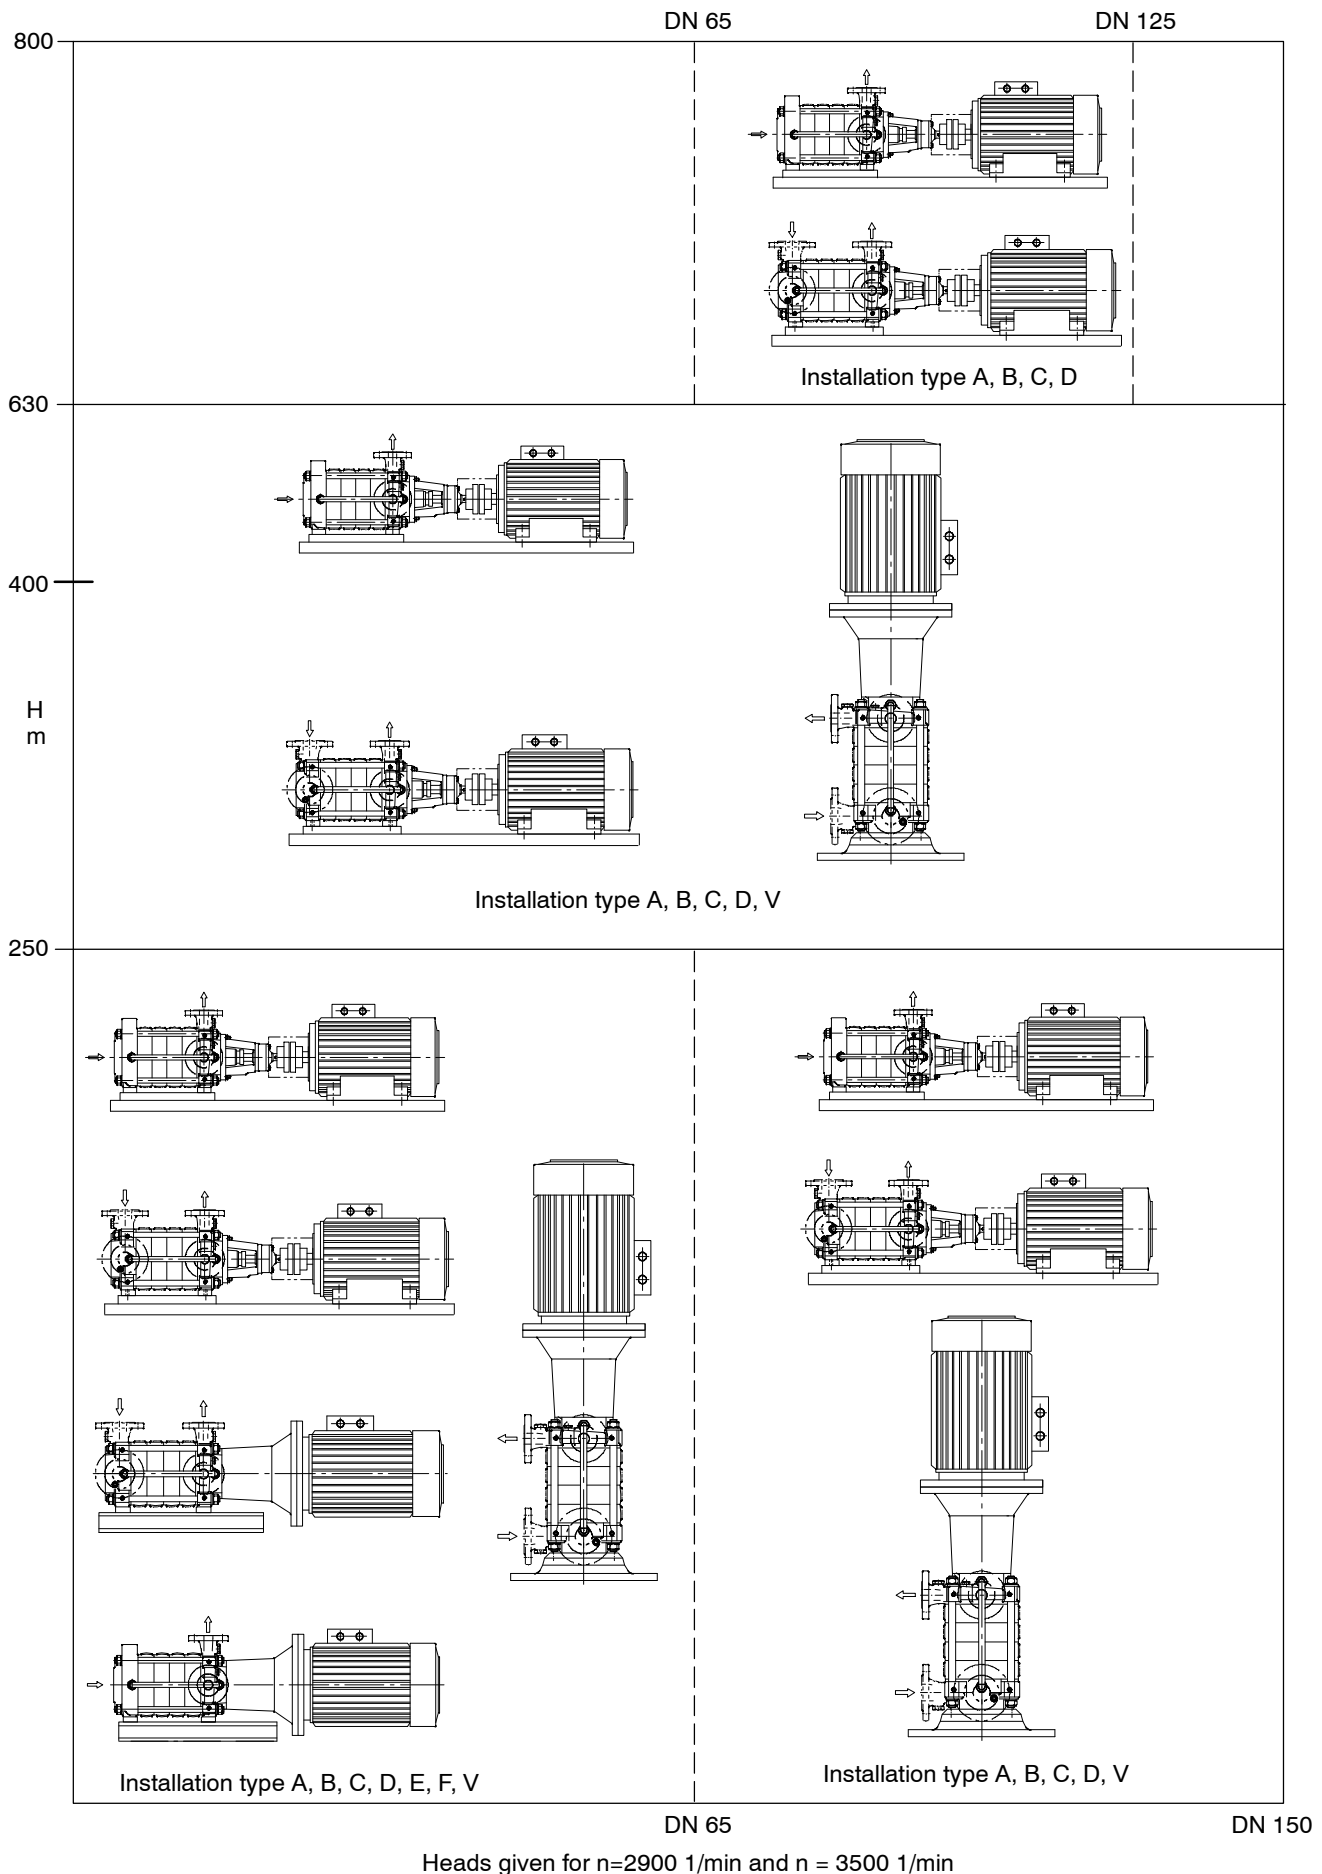

Heads given for n=2900 1/min and n = 3500 1/min


Technical Description

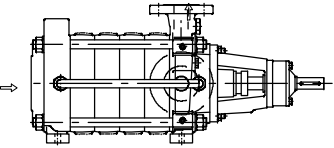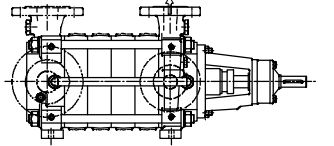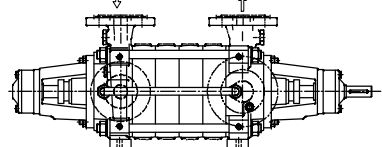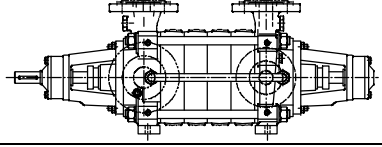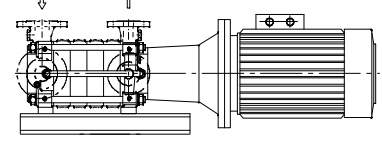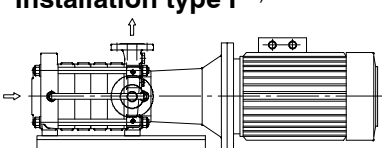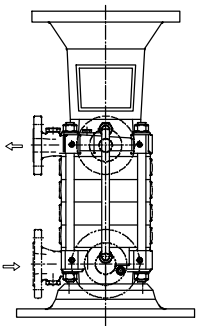Installation type	Technical description																												
Installation type A ³⁾  Installation type B ³⁾ 	<ul style="list-style-type: none"> - Horizontal design, baseplate mounted, - One shaft seal only - 1 Rolling element bearing at drive end - 1 plain bearing at suction end - Axial suction nozzle (block flange up to pump size 50), - Drive on discharge side <p>For the entire Q/H range Multitec-RO: installation type A only</p> <p>Same as installation type A, but with radial suction nozzle</p>	<table border="1"> <tr> <td>Drive</td> <td>Electric motor, Diesel engine, turbine</td> </tr> <tr> <td>Axial thrust balancing</td> <td>By balance drum ¹⁾</td> </tr> <tr> <td>Q_{max} ²⁾</td> <td>840 m³/h</td> </tr> <tr> <td>H_{max}</td> <td>630 m (800 m)</td> </tr> <tr> <td>P_{2 max}</td> <td>63 bar (80 bar)</td> </tr> <tr> <td>t_{max}</td> <td>-10 up to +200 °C</td> </tr> <tr> <td>Shaft seal</td> <td>Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals</td> </tr> <tr> <td>Material</td> <td>Grey cast iron, bronze, cast steel, stainless steel and duplex stainless steel (MTC RO)</td> </tr> </table>	Drive	Electric motor, Diesel engine, turbine	Axial thrust balancing	By balance drum ¹⁾	Q _{max} ²⁾	840 m ³ /h	H _{max}	630 m (800 m)	P _{2 max}	63 bar (80 bar)	t _{max}	-10 up to +200 °C	Shaft seal	Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals	Material	Grey cast iron, bronze, cast steel, stainless steel and duplex stainless steel (MTC RO)											
		Drive	Electric motor, Diesel engine, turbine																										
Axial thrust balancing	By balance drum ¹⁾																												
Q _{max} ²⁾	840 m ³ /h																												
H _{max}	630 m (800 m)																												
P _{2 max}	63 bar (80 bar)																												
t _{max}	-10 up to +200 °C																												
Shaft seal	Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals																												
Material	Grey cast iron, bronze, cast steel, stainless steel and duplex stainless steel (MTC RO)																												
Installation type C ³⁾  Installation type D ⁴⁾ 	<ul style="list-style-type: none"> - Horizontal design, baseplate mounted - two shaft seals - rolling element bearings on drive and suction side - drive on discharge side <p>For the entire Q/H range</p> <p>Same as installation type C, but drive on suction side</p>	<table border="1"> <tr> <td>Drive</td> <td>Electric motor, Diesel engine, turbine</td> </tr> <tr> <td>Axial thrust balancing</td> <td>By balance drum ¹⁾</td> </tr> <tr> <td>Q_{max} ²⁾</td> <td>840 m³/h</td> </tr> <tr> <td>H_{max}</td> <td>630 m (800 m)</td> </tr> <tr> <td>P_{2 max}</td> <td>63 bar (80 bar)</td> </tr> <tr> <td>t_{max}</td> <td>-10 to +200 °C</td> </tr> <tr> <td>Shaft seal</td> <td>Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals</td> </tr> <tr> <td>Material</td> <td>Grey cast iron, bronze, cast steel, cast stainless steel</td> </tr> </table>	Drive	Electric motor, Diesel engine, turbine	Axial thrust balancing	By balance drum ¹⁾	Q _{max} ²⁾	840 m ³ /h	H _{max}	630 m (800 m)	P _{2 max}	63 bar (80 bar)	t _{max}	-10 to +200 °C	Shaft seal	Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals	Material	Grey cast iron, bronze, cast steel, cast stainless steel											
		Drive	Electric motor, Diesel engine, turbine																										
Axial thrust balancing	By balance drum ¹⁾																												
Q _{max} ²⁾	840 m ³ /h																												
H _{max}	630 m (800 m)																												
P _{2 max}	63 bar (80 bar)																												
t _{max}	-10 to +200 °C																												
Shaft seal	Uncooled gland packing Uncooled or cooled mechanical seal, single or double, cartridge-type mechanical seals																												
Material	Grey cast iron, bronze, cast steel, cast stainless steel																												
Installation type E ³⁾  Installation type F ³⁾ 	<ul style="list-style-type: none"> - Horizontal close-coupled pump, - Common bearing for pump and motor, - Rigid coupling, - Radial suction nozzle - Plain bearing at suction end <p>up to DN 65</p> <p>Same as installation type E, but with axial suction nozzle</p> <p>up to DN 65</p>	<table border="1"> <tr> <td>Drive</td> <td>E, F</td> </tr> <tr> <td>Drive</td> <td>Standardised motor</td> </tr> <tr> <td>Axial thrust balancing</td> <td>By balance drum</td> </tr> <tr> <td>Q_{max} ²⁾</td> <td>100 m³/h</td> </tr> <tr> <td>H_{max}</td> <td>250 m</td> </tr> <tr> <td>P_{2 max}</td> <td>40 bar</td> </tr> <tr> <td>t_{max}</td> <td>-10 to +140 °C</td> </tr> <tr> <td>Shaft seal</td> <td>Uncooled gland packing Uncooled mechanical seal, single</td> </tr> <tr> <td>Material</td> <td>Grey cast iron, bronze</td> </tr> </table>	Drive	E, F	Drive	Standardised motor	Axial thrust balancing	By balance drum	Q _{max} ²⁾	100 m ³ /h	H _{max}	250 m	P _{2 max}	40 bar	t _{max}	-10 to +140 °C	Shaft seal	Uncooled gland packing Uncooled mechanical seal, single	Material	Grey cast iron, bronze									
		Drive	E, F																										
Drive	Standardised motor																												
Axial thrust balancing	By balance drum																												
Q _{max} ²⁾	100 m ³ /h																												
H _{max}	250 m																												
P _{2 max}	40 bar																												
t _{max}	-10 to +140 °C																												
Shaft seal	Uncooled gland packing Uncooled mechanical seal, single																												
Material	Grey cast iron, bronze																												
Installation type V ³⁾ 	Vertical close-coupled pump Q/H range ²⁾ : max. 200 kW	<table border="1"> <tr> <td>Drive</td> <td>Standardised motor - Fixed bearing at drive end ⁵⁾</td> <td>Standardised motor</td> </tr> <tr> <td>Fixed bearing</td> <td>Motor: DN 32 DN 50 DN 65</td> <td>in lantern: DN 100 DN 125 DN 150</td> </tr> <tr> <td>Axial thrust balancing</td> <td>by balance drum</td> <td>by balance drum ¹⁾</td> </tr> <tr> <td>Q_{max} ²⁾</td> <td colspan="2">400 m³/h</td> </tr> <tr> <td>H_{max}</td> <td colspan="2">630 m</td> </tr> <tr> <td>P_{2 max}</td> <td colspan="2">63 bar</td> </tr> <tr> <td>t_{max}</td> <td colspan="2">-10 to +140 °C</td> </tr> <tr> <td>Shaft seal</td> <td colspan="2">Uncooled packing; uncooled mechanical seal single</td> </tr> <tr> <td>Material</td> <td colspan="2">Grey cast iron, bronze, cast steel, cast stainless steel</td> </tr> </table>	Drive	Standardised motor - Fixed bearing at drive end ⁵⁾	Standardised motor	Fixed bearing	Motor: DN 32 DN 50 DN 65	in lantern: DN 100 DN 125 DN 150	Axial thrust balancing	by balance drum	by balance drum ¹⁾	Q _{max} ²⁾	400 m ³ /h		H _{max}	630 m		P _{2 max}	63 bar		t _{max}	-10 to +140 °C		Shaft seal	Uncooled packing; uncooled mechanical seal single		Material	Grey cast iron, bronze, cast steel, cast stainless steel	
Drive	Standardised motor - Fixed bearing at drive end ⁵⁾	Standardised motor																											
Fixed bearing	Motor: DN 32 DN 50 DN 65	in lantern: DN 100 DN 125 DN 150																											
Axial thrust balancing	by balance drum	by balance drum ¹⁾																											
Q _{max} ²⁾	400 m ³ /h																												
H _{max}	630 m																												
P _{2 max}	63 bar																												
t _{max}	-10 to +140 °C																												
Shaft seal	Uncooled packing; uncooled mechanical seal single																												
Material	Grey cast iron, bronze, cast steel, cast stainless steel																												


1) For small number of stages without balance drum: Axial thrust is fully absorbed by the axial bearings.
 2) N.B.: The values given for Q apply to 50 Hz; for 60 Hz values please refer to the specific performance curves.
 3) Clockwise drive rotation when viewed from the motor end.
 4) Anti-clockwise drive rotation when viewed from the motor end.
 5) On Multitec 32 - 50 - 65 the motor bearings on the coupling side are fixed bearings.

Pressure and temperature limits


Material JL1040 (GJL-250)

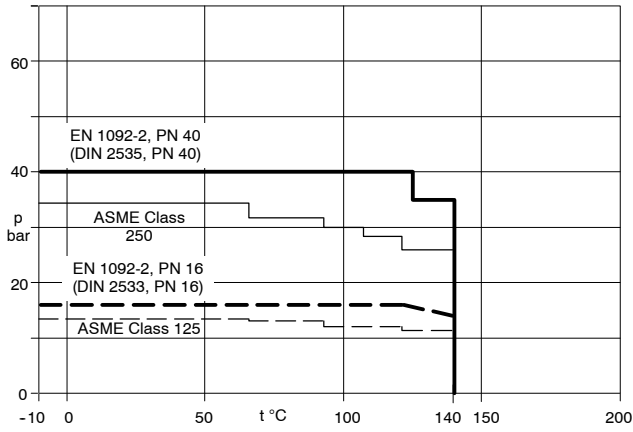


Material GP240GH+N (1.0619+N)

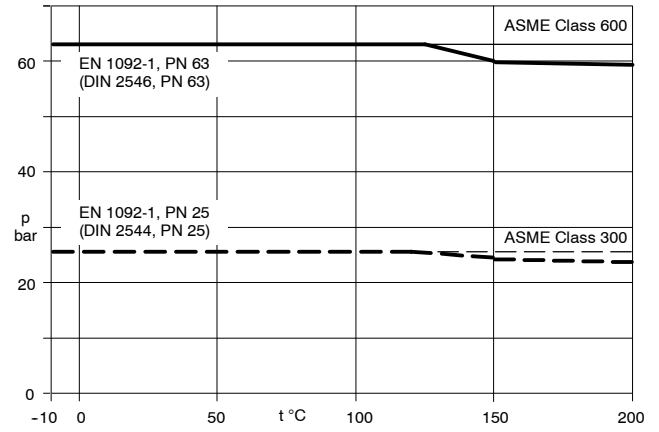

Material 1.4408

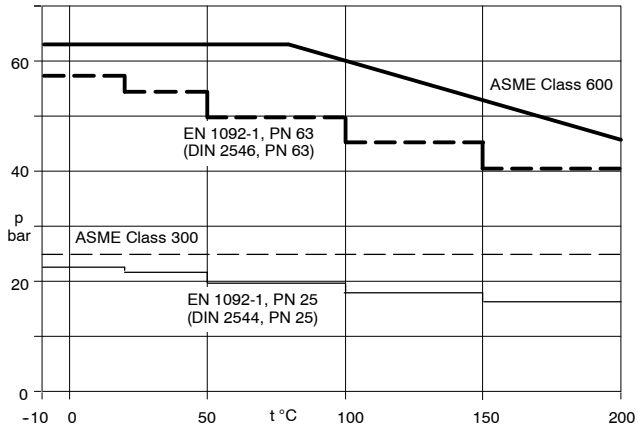

Material 1.4317, 1.4517

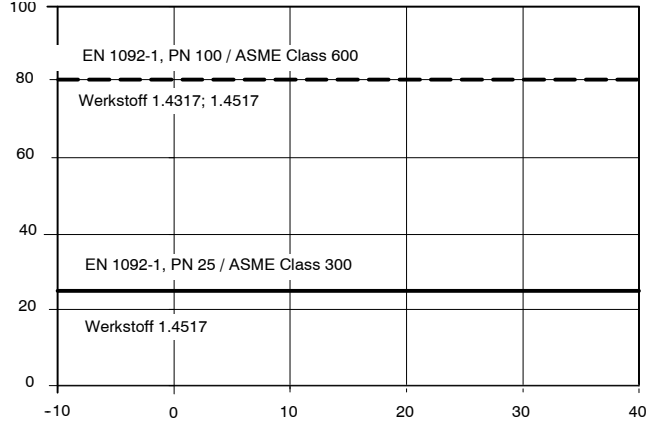

Mechanical seal code 2)
Mechanical seal 2)
MULTITEC :

Mechanical seals	Supplier	Static seals	Uncooled mechanical seal			Cooled mechanical seal
			up to 100 °C	up to 120 °C	up to 140 °C	up to 200 °C 3)
Unbalanced bellows-type seal RMG13 (U3BEGG) 1)	Burgmann	EPDM	61	-		-
Balanced mechanical seal H12N (AQ1EGG)		EPDM	62			-
Balanced mechanical seal H17GN (Q12Q1VGG) 4)		FPM	63	-		-
Balanced mechanical seal H7N (Q1AEGG)		EPDM	-			64
Balanced mechanical seal H17GN (Q12BE3GG) 4)		EPDM	67		-	-
Unbalanced bellows-type seal MG13, MG1S4 (U3U3VGG) 5)		FPM	68	-		-
Balanced mechanical seal H177GN (U22U22VGG) 5)		FPM	68	-		-
Balanced mechanical seal H7N (U2U2VGG) 5)		FPM	68	-		-
Balanced mechanical seal HRN (AQ1EMG)		EPDM	69			-
Balanced mechanical seal H7N (Q1AEGG)		EPDM	81			-
Balanced mechanical seal HJ977GN (Q12Q1VGG)		FPM	53	-		-
Balanced mechanical seal H12N (AQ1VGG) 4)		FPM	55	-		-
Balanced mechanical seal HRN (BQ1EMG)		EPDM	59		-	-
Balanced mechanical seal 57B (AQ1EGG)		John Crane	EPDM	42		
Balanced mechanical seal 57B (Q1Q1VGG)	FPM		43	-		-
Balanced mechanical seal 57B (AQ1VGG)	FPM		45	-		-
Single cartridge mechanical seal Cartex SN6 (AQ1EMG)	Burgmann	EPDM	92			-
Single cartridge mechanical seal Cartex SN6 (Q1Q1VMG)		FPM	93	-		-
Single cartridge mechanical seal Cartex SN6 (AQ1VMG)		FPM	95	-		-
Mechanical seal with quench supply H7N (Q1AEGG)	Burgmann	EPDM	71			-
Double mechanical seal in tandem arrangement H7N (Q1AEGG)		EPDM	72			-
Double mechanical seal in back-to-back arrangement H7N (Q1AEGG)		EPDM	73			-

1) Sizes 32 and 50 only

2) Other seal designs on request

3) For installation types A, B, C and D only; air-cooled up to size 100, other sizes water-cooled

4) H7N for size 150

5) MG13 for sizes 32 and 50, MG1S4 for size 65, H177GN for sizes 100 and 125, H7N for size 150

Gland packing: PTFE-impregnated polyacryl

	P max	up to 100 °C	up to 140 °C
Without balance drum	25 bar	65	66
With balance drum	63 bar		
Static seals		FPM	EPDM

Design	N/b	N/c
Plant conditions	with suction head operation $P_{S\text{ abs.}} \geq 1$ bar	$P_{S\text{ abs.}} < 1$ bar (vacuum vessel) with clean external sealing liquid barrier pressure > pressure to be sealed
Technical features	without lantern ring	1 lantern ring on suction side 1 lantern ring on discharge side 2 tapped holes for auxiliary pipework

Multitec-RO

	Code		
	80	82	83
Mechanical seal	MG12 AQ1VMM	M7N Q1AVMM	MG12 Q1Q1VMM
Max. pressure at the mechanical seal	16 bar	25 bar	10 bar
Fluid handled	Sea water without solids	Sea water without solids	Sea water with sol- ids content < 2%

Materials table

Part no.	Description	Material variant					
		10 3)	17 3)	11 3)	15 3)	12 3)	16 3)
106	Suction casing	JL1040	GP240GH+N	JL1040	GP240GH+N	JL1040	GP240GH+N
107	Discharge casing	JL1040	GP240GH+N	JL1040	GP240GH+N	JL1040	GP240GH+N
108	Stage casing	JL1040	JL1040	JL1040	JL1040	S355J2G3 1)/ JL1040 2)	S355J2G3 1)/ JL1040 2)
171	Diffuser	JL1040 2) 5)	JL1040 2) 5)	JL1040 2) 5)	JL1040 2) 5)	CC480K-GS	CC480K-GS
210	Shaft	C45+N 4)	C45+N 4)	C45+N 4)	C45+N 4)	C45+N 4)	C45+N 4)
230	Impeller	JL1040	JL1040	CC480K-GS	CC480K-GS	CC480K-GS	CC480K-GS
231	Suction impeller	JL1040	JL1040	CC480K-GS	CC480K-GS	CC480K-GS	CC480K-GS
350	Bearing housing	JL1040	JL1040	JL1040	JL1040	JL1040	JL1040
381/529	Plain bearing assy.	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	JL1040	JL1040	JL1040	JL1040	JL1040	JL1040
502.1	Casing wear ring (suction side)	JL1040 9)	JL1040	1.4138 9)	1.4138	1.4138 9)	1.4138
502.2 2)	Casing wear ring (stages)	JL1040	JL1040	1.4138	1.4138	1.4138	1.4138
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800
524	Shaft protecting sleeve (packing)	1.4122	1.4122	1.4122	1.4122	1.4122	1.4122
550.1 6)	Disc	1.4301	1.4301	1.4301	1.4301	1.4301	1.4301
59-4	Balance drum	1.4021	1.4021	1.4021	1.4021	1.4021	1.4021
540	Bush	JL1040	JL1040	JL1040	JL1040	JL1040	JL1040
905	Tie bolt	42 CrMo4	30 NCD 16	42 CrMo4	30 NCD 16	42 CrMo4	30 NCD 16

Part no.	Description	Material variant					
		13 3)	14 3)	20	21	22	23
106	Suction casing	JL1040	JL1040	GP240GH+N	GP240GH+N	GP240GH+N	GP240GH+N
107	Discharge casing	JL1040	JL1040	GP240GH+N	GP240GH+N	GP240GH+N	1.4408
108	Stage casing	JL1040	JL1040	S355J2G3 1)/ GP240GH+N 2)	S355J2G3 1)/ GP240GH+N 2)	S355J2G3 1)/ GP240GH+N 2)	S355J2G3 1)/ GP240GH+N 2)
171	Diffuser	JL1040 2) 5)	JL1040 2) 5)	JL1040	JL1040	1.4408	1.4408
210	Shaft	C45+N 4)	C45+N 4) 8)	C45+N 4)	C45+N 4)	1.4021+QT 8)	1.4021+QT 8)
230	Impeller	JL1040	1.4408	JL1040	JL1040	1.4408	1.4408
231	Suction impeller	1.4408	1.4408	JL1040	1.4408	1.4408	1.4408
350	Bearing housing	JL1040	JL1040	JL1040	JL1040	JL1040	JL1040
381/529	Plain bearing assy.	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	JL1040	JL1040	GP240GH+N / 1.4404 10)	GP240GH+N / 1.4404 10)	GP240GH+N / 1.4404 10)	1.4408 / 1.4404 10)
502.1	Casing wear ring (suction side)	JL1040 9)	JL1040 9)	JL1040	JL1040	1.4138	1.4138
502.2 2)	Casing wear ring (stages)	JL1040	JL1040	JL1040	JL1040	1.4138	1.4138
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4571	1.4571
524	Shaft protecting sleeve (packing)	1.4122	1.4122	1.4122	1.4122	1.4122	1.4122
550.1 6)	Disc	1.4301	1.4301	1.4301	1.4301	1.4571	1.4571
59-4	Balance drum	1.4021	1.4021	1.4021	1.4021	1.4021	1.4021
540	Bush	JL1040	JL1040	JL1040	JL1040	1.4021	1.4021
905	Tie bolt	42 CrMo4	42 CrMo4	30 NCD 16	30 NCD 16	30 NCD 16	30 NCD 16

- 1) For sizes DN 32 to DN 100
- 2) For sizes DN 125 and DN 150
- 3) Up to $t \leq 140$ °C
- 4) Available in material 1.4021
- 5) Sizes DN 32 to DN 100: integrated in stage casing
- 6) For sizes DN 32 to DN 100 only; also used as casing wear ring
- 7) Size DN 125: last stage casing made of 1.4317
- 8) Available in material 1.4462
- 9) For sizes DN 100 to DN 150
- 10) 1.4404 for shaft seal code 64 only
- 11) Multitec RO only (installation type A)

Part no.	Description	Material variant				
		25	26	27	30	31 / RO ¹¹⁾
106	Suction casing	GP240GH+N	GP240GH+N	GP240GH+N	1.4408	1.4517
107	Discharge casing	GP240GH+N	GP240GH+N	1.4317	1.4408	1.4517
108	Stage casing	S355J2G3 ¹⁾ / GP240GH+N ²⁾	S355J2G3 ¹⁾ / GP240GH+N ²⁾	S355J2G3 ¹⁾ / GP240GH+N ²⁾ / 1.4317 ⁷⁾	1.4404 ¹⁾ / 1.4408 ²⁾	1.4517
171	Diffuser	JL1040	CC480K-GS	JL1040	1.4408	1.4517
210	Shaft	C45+N ⁴⁾	C45+N ⁴⁾	1.4021+QT	1.4462	1.4462
230	Impeller	CC480K-GS	CC480K-GS	JL1040	1.4408	1.4517
231	Suction impeller	CC480K-GS	CC480K-GS	JL1040	1.4408	1.4517
350	Bearing housing	JL1040	JL1040	JL1040	JL1040	JL1040
381/529	Plain bearing assy.	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	GP240GH+N	GP240GH+N	GP240GH+N	1.4408 / 1.4404 ¹⁰⁾	1.4517
502.1	Casing wear ring (suction side)	1.4138	1.4138	JL1040	1.4571	1.4462
502.2 ²⁾	Casing wear ring (stages)	1.4138 ²⁾	1.4138 ²⁾	JL1040	1.4571	1.4462 ²⁾
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4571	1.4462
524	Shaft protecting sleeve (packing)	1.4122	1.4122	1.4122	-	-
550.1 ⁶⁾	Disc	1.4301	1.4301	1.4301	1.4571	1.4539
59-4	Balance drum	1.4021	1.4021	1.4021	1.4404	1.4462
540	Bush	JL1040	JL1040	JL1040	1.4138	1.4462
905	Tie bolt	30 NCD 16	30 NCD 16	30 NCD 16	30 NCD 16	30 NCD 16

1) For sizes DN 32 to DN 100

2) For sizes DN 125 and DN 150

3) Up to $t \leq 140^\circ\text{C}$

4) Available in material 1.4021

5) Sizes DN 32 to DN 100: integrated in stage casing

6) For sizes DN 32 to DN 100 only; also used as casing wear ring

7) Size DN 125: last stage casing made of 1.4317

8) Available in material 1.4462

9) For sizes DN 100 to DN 150

10) 1.4404 for shaft seal code 64 only

11) Multitec RO only (installation type A)

Material Equivalents

Description	Short designation and material No.	Standard	to NF A	to ASTM
Cast iron	JL1040 / GJL-250	EN 1561	-	A48:40B
Bronze	CC480K-GS	EN 1982	-	B505C90250
Steel	C45+N / 1.0503+N	EN 10083-2	-	A29Gr.1045
Steel	S355J2G3 / 1.0570	EN 10025	E36-4	A678C
Cast steel	GP240GH+N / 1.0619+N	EN 10213-2	-	A216WCB
Chrome steel	1.4021+QT / X20Cr13+QT	EN 10088	-	A276:420
Chrome nickel steel	1.4122 / X35CrMo17	EN 10088	-	A276S42010 (similar)
Chrome nickel steel	1.4057+QT800 / X17CrNi16-2-QT800	EN 10088-3	-	A276:431
Chrome nickel steel	1.4138 / GX120CrMo29-2	SEW 410	Z1200D29-02-M	-
Chrome nickel steel	1.4301 / X5CrNi18-10	EN 10088	-	A276:304
Chrome nickel molybdenum steel	1.4404 / X2CrNiMo 17-12-2	EN 10088	-	A276:316L
Chrome nickel molybdenum cast steel	1.4408 / GX5CrNiMo19-11-2	EN 10213	-	A743CF8M
Chrome nickel molybdenum steel	1.4462 / X2CrNiMoN22-5-3	EN 10088	-	A473 S32950
Chrome nickel molybdenum steel	1.4571 / X6CrNiMoTi17-12-2	EN 10088	-	A276:316
Silicon carbide	SiC without free silicon	-	SiC without free silicon	SiC without free silicon
Bar steel	20NiCrMo14-5 I (1.6772) / 30 NCD 16	VdTÜV 337 / KSB-Materials data sheet WSZ 1179	16NC11n. A36-612 / -	A540 Gr. B24 / -
Steel	42CrMo4 / 1.7225	EN 10083-1	-	A322GR.4140 (similar)
Chrome nickel molybdenum cast steel	1.4317	EN 10213-2	-	A487 Grade CA6NM
Cast duplex stainless steel	1.4517	EN 10213-4	-	A995 Grade CD4MCuN
Austenitic stainless steel	1.4539	EN 10028-7	-	

Multitec Benefits at a glance

1st stage with special suction impeller

- Low NPSH required
- Improved suction behaviour, higher operational reliability in suction lift operation

Newly developed hydraulics

- High efficiencies
- Low operating costs


Casing wear rings
 Sizes 32 to 100:
 Cover discs/Casing wear ring made of stainless steel

- High resistance
- Easy and cost-effective replacement

Sizes 125 to 150:
 Casing wear rings as per material code


Axial thrust balancing with balance drum

- Low bearing loads under variable operating conditions
- Low pressure in shaft seal chamber (⇒ use of standard seals)
- Long life of rolling element bearings and shaft seal

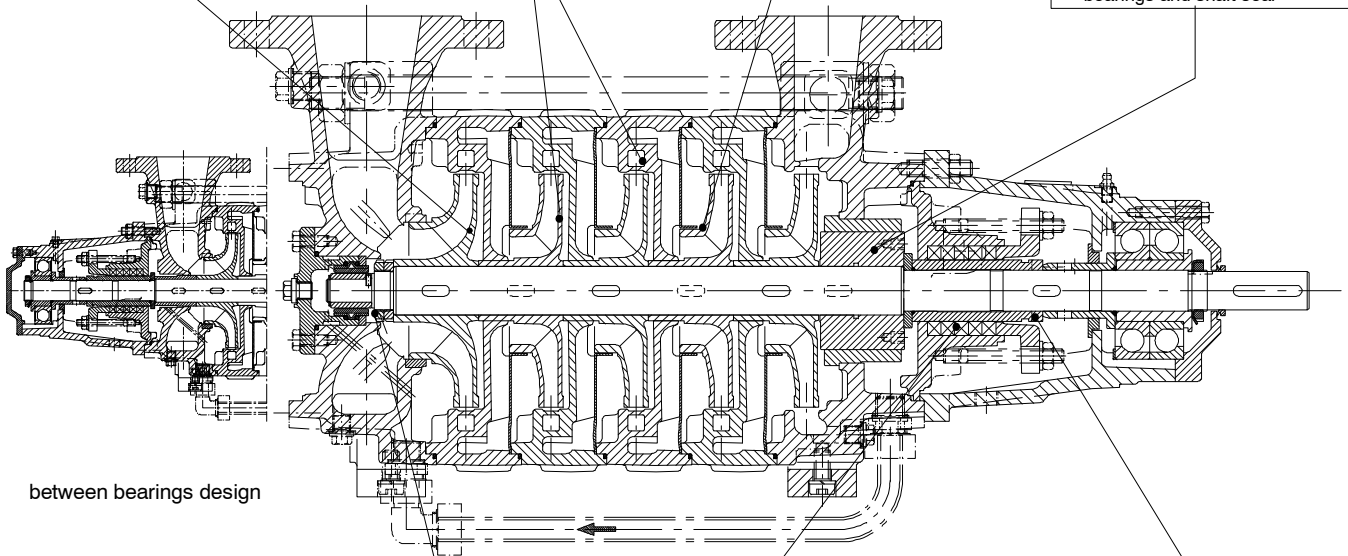

between bearings design


Adaptation of the material from many possible options
 (Grey cast iron, steel, stainless steel)

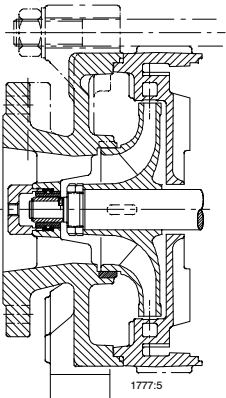

Axial inlet, pump size ≥ 65

Plain bearings made of silicon carbide


- Longer service life
- Higher reliability
- Maintenance-free
- One shaft seal only
- Dimensioned for start-stop operation and all speeds



Single mechanical seal

Shaft sealed by


- Uncooled gland packing up to 140 °C
- Standardised mechanical seal, balanced or non-balanced
- Uncooled up to 140 °C, cooled up to 200 °C
- Single or double-mechanical seals
- Cartridge-type mechanical seals




Double mechanical seal, e.g. tandem arrangement

Shaft protecting sleeve made of stainless steel

- Efficient protection of the shaft from wear
- Quick and simple replacement of the shaft seal

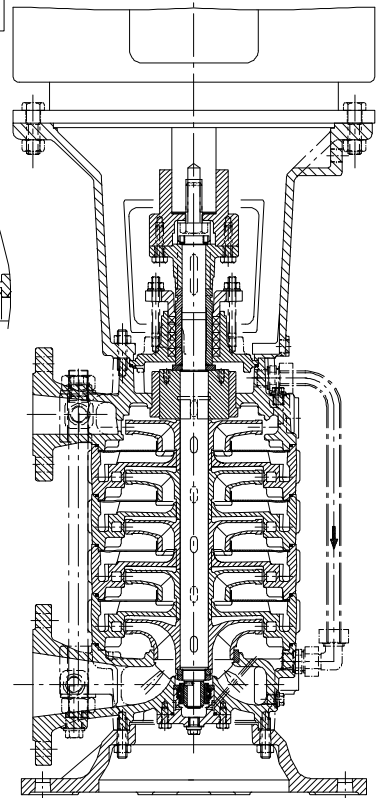


Installation type V;
 Separate rolling element bearing in the motor lantern from pump size 100 upwards

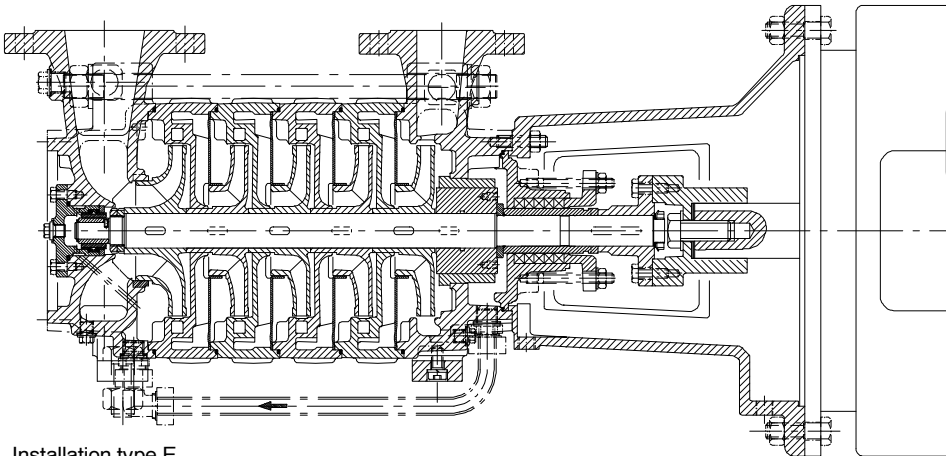

Installation type E

Multitec-RO
Benefits at a glance
 Pump size 65 to 100

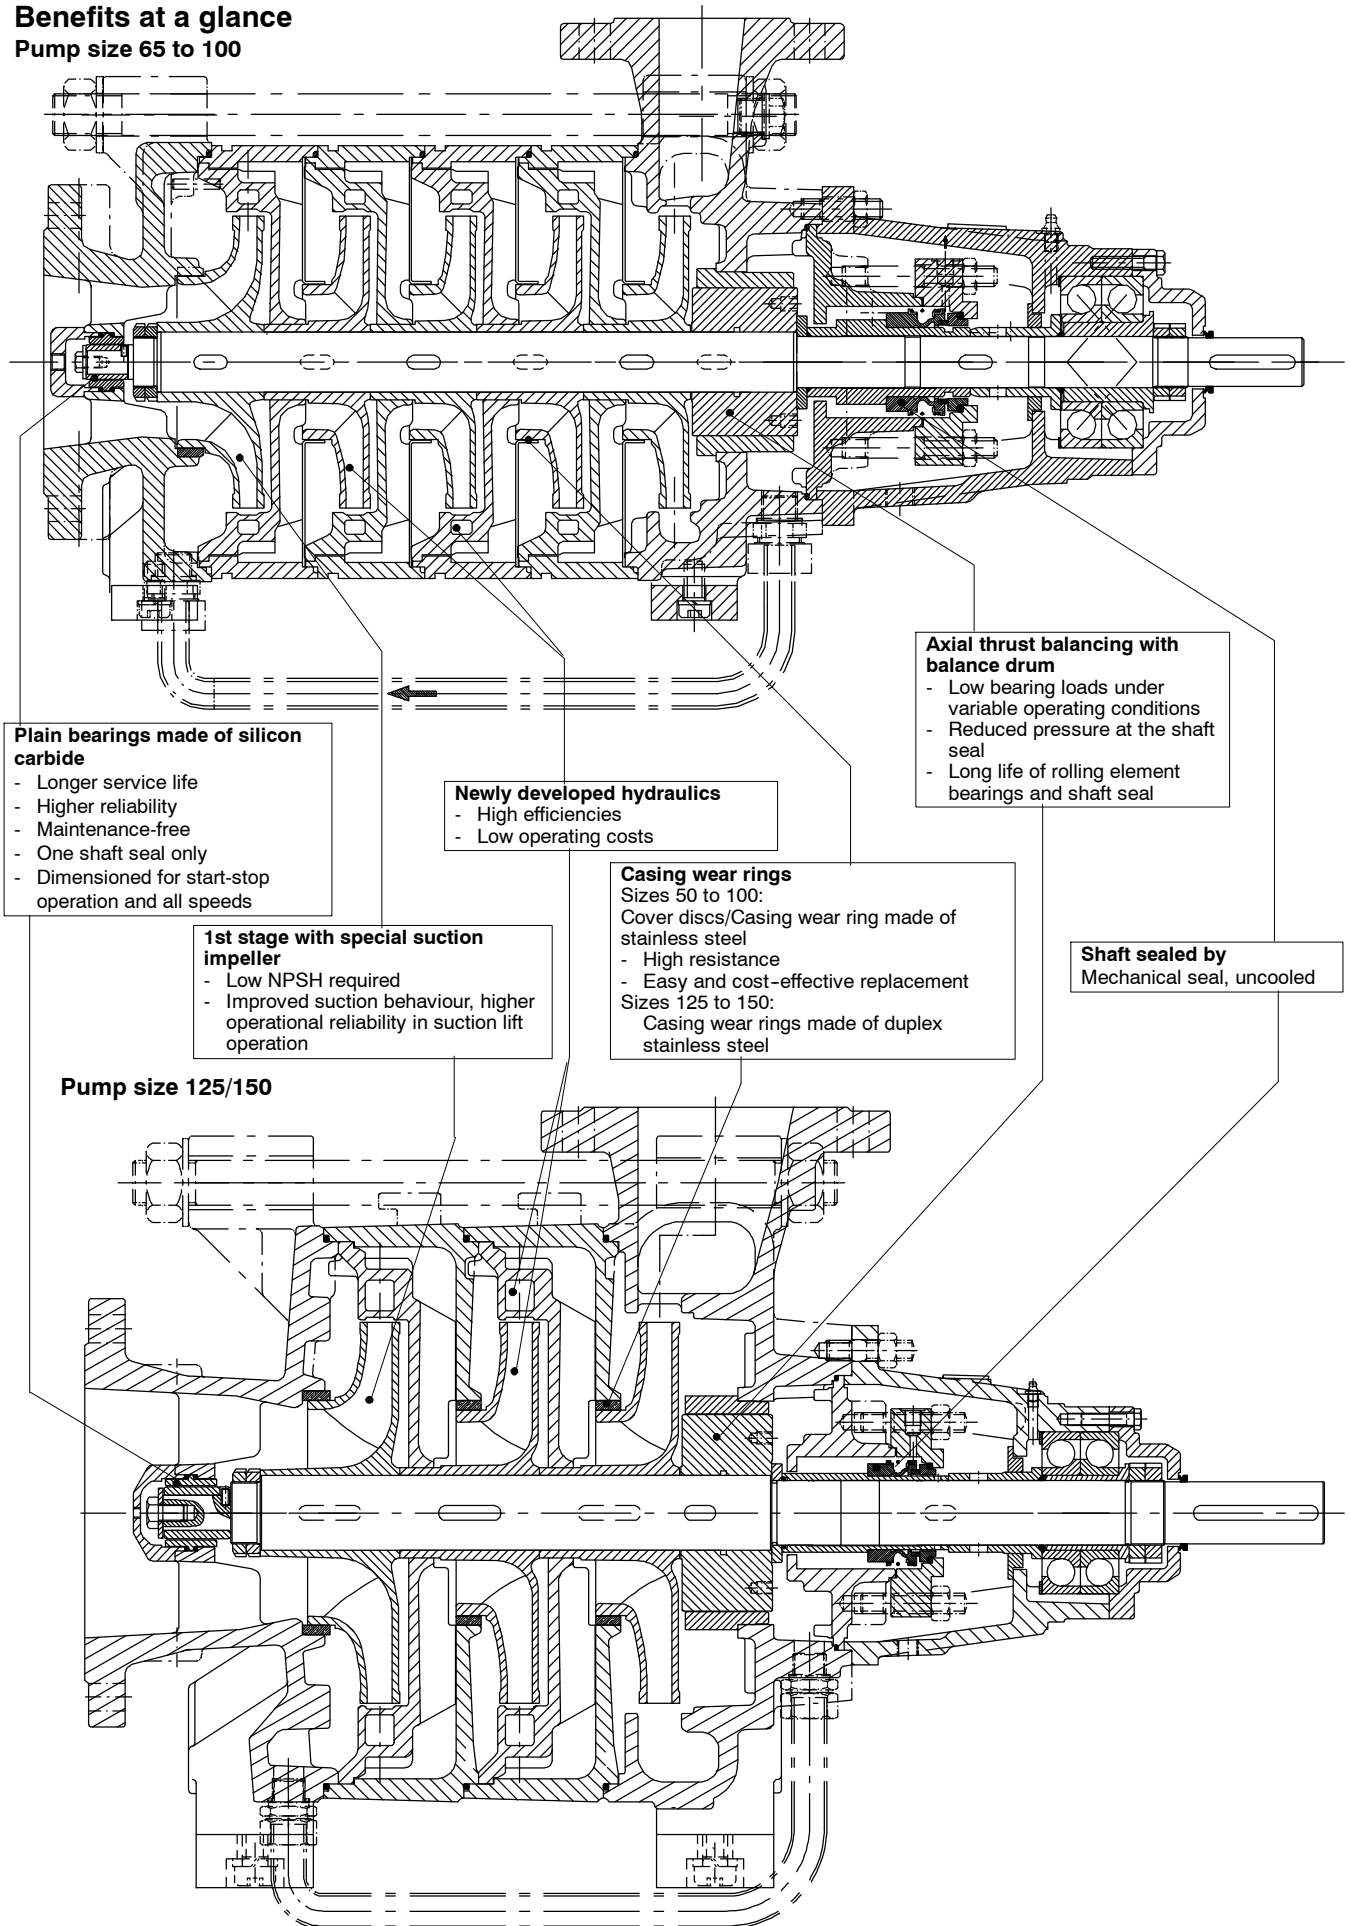

Technical data

		Unit	Pump sizes							
			32	50	65	100	125	150		
Shaft diameter	at the coupling	mm	22	28	32	40	50	60		
Bearings	Fixed bearing		6309C3	2x7309 BUA	2x7309 BUA	2x7312 BUA	2x7312 BUA		2x7315 BUA	
	Floating bearing		6309C3	6309C3	6309C3	6312 C3	6312 C3		6315 C3	
	Plain bearing		SiC							
Gland packing	Dimensions of packing rings	mm	10 x 10	10 x 10	10 x 10	12 x 12	12 x 12		16 x 16	
	Number of packing rings	piece	5	5	5	5	6		6	
	Width of lantern ring	mm	20	20	20	25	25		32	
Shaft protecting sleeve	Gland packing	mm	45 Ø	45 Ø	45 Ø	56 Ø	66 Ø		78 Ø	
	Mechanical seal single	mm	35/38Ø ¹⁾	35/38Ø ¹⁾	40 Ø	50 Ø	60 Ø		70 Ø	
Drive (P/n value)	Shaft C 45 N		0.0214	0.0523	0.0697	0.15	0.3016		0.5371	
	Shaft 1.4021+QT		0.0346	0.0846	0.1128	0.2426	0.4879		0.8688	
	Shaft 1.4462		0.0302	0.0738	0.0984	0.2118	0.4258		0.7582	
Other	Hydraulics Max. impeller diameter	mm	2.1	3.1/4.1	5.1/6.1	7.1/8.1	9.1/9.2	10.1/10.2	11.1/11.2	12.1/12.2
	Length of spacer sleeve for spacer-type couplings	mm	142	170/173	193/214	241/245	301/273	305/270	378/342	382/337
		mm	140	140	140	180	180		200	

1) Balanced mechanical seal: 35 mm, non-balanced mechanical seal: 38 mm

Casing

Radial discharge casings can be turned in steps of 90°. Identical seal housings for gland packing and mechanical seal (separate component).

Stage casings, discharge casing and seal housings sealed by confined O-rings.

Slightly elastic or non-elastic sealing rings (PTFE etc.) can be installed.

Standard flange designs

Material variant	Flanges drilled to EN			Flanges drilled to ASME Class		
	Standard	Suction flange	Discharge flange	Suction flange	Discharge flange	
10	EN 1092-2	PN 16	PN 40	125 RF	250 RF	
11	EN 1092-2	PN 16	PN 40	125 RF	250 RF	
12	EN 1092-2	PN 16	PN 40	125 RF	250 RF	
13	EN 1092-2	PN 16	PN 40	125 RF	250 RF	
14	EN 1092-2	PN 16	PN 40	125 RF	250 RF	
15	EN 1092-1	PN 25	PN 63	300 RF	600 RF	
16	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
17	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
20	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
21	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
22	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
23	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
25	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
26	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
27	EN 1092-1	PN 25	PN 100 ³⁾	300 RF	600 RF	
30	EN 1092-1	PN 25	PN 63	300 RF	600 RF ²⁾	
31 (RO)	63 bar	EN 1092-1	PN 25	PN 63	300 RF	600 RF
	80 bar	EN 1092-1	PN 25	PN 100 ³⁾		

2) For pump size 32: discharge flange DN 1/4" can also be supplied with DN 1 1/2", if requested

3) Only for MTC 100 and 125

Other flange machining variants on request.

Drive

By three-phase squirrel cage motor;

types of construction:

Installation types A, B, C and D: IMB3

Installation types E, F: IMV1 up to 45 kW, >45 kW IMB 35

Installation type V: IMV1

Enclosure: IP 55/IP 23

Thermal class: F

Direction of rotation:

Installation types A, B, C, E, F, V clockwise, viewed from the drive end

Installation type D counterclockwise, viewed from the drive end

Options: special voltages, explosion proof, Insulated bearing, heating resistor

Couplings

Flexible couplings without/with spacer. Others on request.

Close-coupled pumps up to DN 65 with rigid coupling, above DN 65 with flexible coupling without spacer sleeve.

Coupling guard

Cylindrical coupling guard (standard).

On request: rigid coupling guard with feet (will support a person's weight).

Baseplates

Sectional steel, welded or U-rails for complete unit (pump and motor).

Horizontal close-coupled units are supplied with 2 U-rails for easier installation.

Documentation

Standard documentation:

- Data sheet
- Characteristic curve
- Installation plan
- Wiring diagram
- EC declaration of conformity

Other documentation available on request

Inspections/Certificates

Standard without special certificates:

Hydrostatic internal pressure test of pressure-retaining components:

Discharge casing, stage casings, suction casing and seal housing at 1.3 times the max. permissible internal operating pressure.

On customer's request:

At extra charge:

- Material certificate 2.2 to EN 10204 for the components as per QCP ZN 58014 / ZN 58027
- Test certificate 3.1B to EN 10204
- Dimensions check
- Coating inspection
- Final inspection
- Strip test
- Hydrostatic pressure test of pressure-retaining components

Hydraulic performance tests:

- Hydraulic performance test to ISO 9906 or Hydraulic Institute
- NPSH-test

Other tests available:

- Balancing test
- Vibration test

Guarantee conditions

The duty point shall be limited to the area defined by the performance curve. The minimum flow rate specified in the quotation must be observed.

Pump operation outside the performance curve range may cause destruction of the pump set and loss of warranty.

The NPSH values given in the characteristic curves booklet are measured values which correspond to the cavitation limit. They apply to cold water without gas.

To allow for measuring tolerances and production-related scattering, a margin of 10 %, but not less than 0.5 m must be taken into account.

The heads and powers documented in the characteristic curves booklet apply to liquids with a density $\rho = 1.0 \text{ kg/dm}^3$ and a kinematic viscosity of $20 \text{ mm}^2/\text{s}$.

Forces and moments

See operating manual.

The forces and moments indicated must not be exceeded.

Noise characteristics

Rated power input P_N (kW)	Sound pressure level \bar{L}_{pA} (dB) ¹⁾²⁾			
	Pump only		Pump with motor	
	1450 1/min	2900 1/min	1450 1/min	2900 1/min
2.2	56	57	60	65
3.0	58	60	62	67
4.0	59	61	63	68
5.5	61	63	65	70
7.5	63	65	66	71
9	64	66	68	73
11	65	67	68	73
15	66	68	70	75
18.5	67	69	71	76
22	68	70	72	77
30	69	71	73	78
37	70	72	74	79
45	71	73	75	79
55	71	74	75	80
75	72	74	77	82
90	72	75	77	82
110	73	75	78	83
132	73	76	78	83
160	74	76	79	84
200	75	77	80	85
250	75	78	--	--
315	76	78	--	--

1) Measured at a distance of 1 m from the pump outline (as per DIN 45635, Parts 1 and 24)

2) For 60 Hz operation: 3500 rpm +3dB; 1750 rpm 1dB

Noise characteristics can only be guaranteed after consultation with the design/engineering department.

Noise characteristics for higher power ratings on request.

Coating/Preservation

to AN 1865

Recommended stock of spare parts for two years' operation acc. to DIN 24 296

Part no.	Description	Number of pumps (including stand-by pumps)						
		2	3	4	5	6 and 7	8 and 9	10 and more
For shaft seal codes 65 and 66 (gland packing)								
210	Shaft with small parts	1	1	2	2	2	3	30 %
230	Impeller (set = S)	1	1	1	2	2	3	30 %
231	Suction impeller	1	1	1	2	2	3	30 %
320.1 4)	Angular contact ball bearings (set)	1	1	2	2	3	4	50 %
320.2 4)	Radial ball bearing	1	1	2	2	3	4	50 %
381 (MTC) or 545 (MTC RO) 5)	Bearing cartridge (MTC) or bearing bush (MTC RO)	1	1	2	2	3	4	50 %
411.6/.7	V-Ring (set)	4	8	8	8	9	12	150 %
412	O-ring (set)	4	8	8	8	9	12	150 %
461	Gland packing (set)	4	6	8	8	9	12	150 %
502 1)	Casing wear ring (set)	2	2	2	3	3	4	50 %
520	Sleeve	1	1	2	2	3	4	50 %
524	Shaft protecting sleeve	2	2	2	3	3	4	50 %
525	Spacer sleeve	2	2	2	3	3	4	50 %
529	Bearing sleeve	1	1	2	2	3	4	50 %
540.1	Bush	1	1	1	2	2	3	30 %
550.1 2)	Disc	2	2	2	3	3	4	50 %
59-4	Balance drum	1	1	1	2	2	3	30 %
For shaft seal codes with mechanical seal								
433	Compl. mechanical seal 3)	2	3	4	5	6	7	90 %
523	Shaft sleeve (set)	2	2	2	3	3	4	50 %

1) Pump sizes 125 and 150 only, and casing wear ring in suction casing for pump sizes 32 to 100 of material variants 20 to 30.
 2) Only pump sizes 32 up to 100

3) The parts 461 and 524 are not installed
 4) Parts form a subassembly with part no. 520
 5) Part No. 381 or 545 forms an assembly with Part No. 529.

Nozzle Positions

Nozzle positions are variable. The nozzle position required must be entered in the selection software when ordering. **N.B.!** Nozzle position 0-0 (or fig. 2 for vertical installation) is only possible for all pump sizes and material variants from the third stage upwards! Exception: DN 150 in material variants 10, 11, 12 and 14: on these pumps, nozzle position 0-0 is possible **from the second stage upwards!**

Nozzle positions are defined as viewed from the drive end.


1. Horizontal installation (A, B, C, D, E and F)

The first letter defines the position of the suction nozzle, the second letter that of the discharge nozzle.


Nozzle positions on horizontal pumps:

- A = axial suction nozzle
- 0 = suction and/or discharge nozzle on top
- R = suction and/or discharge nozzle on the right
- L = suction and/or discharge nozzle on the left


Examples of nozzle position codes in the selection software:




A - 0



0 - 0



L - 0



R - L

2. Vertical installation

The suction nozzle (bottom) is regarded as a fixed point. The illustration number indicates the displacement of the discharge nozzle versus the suction nozzle.




Fig. 1

1 = turned by 180°




Fig. 3

3 = turned by 90° to the left




Fig. 2

2 = same position





Fig. 4

4 = turned by 90° to the right

Dimensions

Dimensions are non-binding and provided for general information only.


Multitec A, B, C, D / Multitec RO A

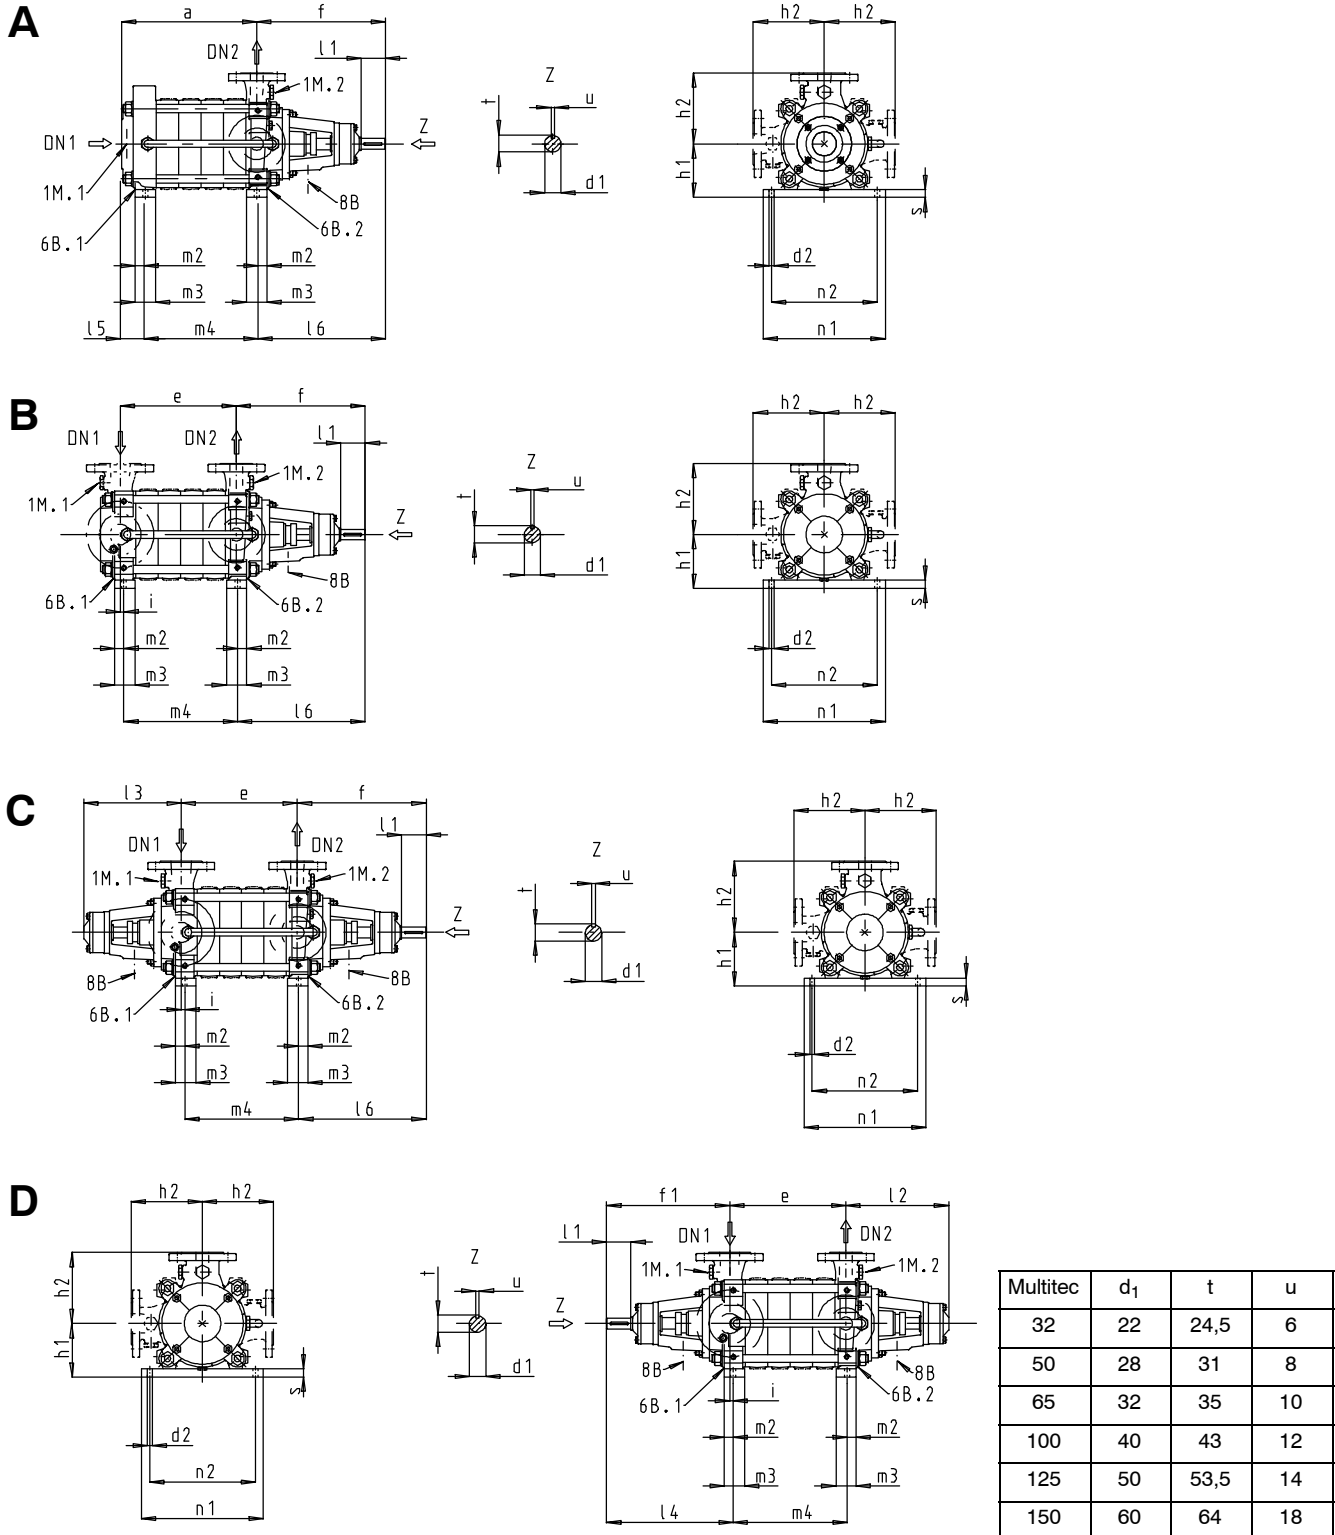

Anschlüsse / Connections / Raccordi / Attacchi / Aansluitingen / Conexiones

	G = ISO 228/1 Rp = ISO 7/1	Multitec A / Multitec RO A						Multitec B, C, D					
		32	50	65	100	125	150	32	50	65	100	125	150
1M.1 (*)	G	-	-	1/2	1/2	1/2	1	1/2	1/2	1/2	1/2	1/2	1/2
1M.2 (*)	G	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
6B.1 (*)	G	-	-	1/4	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1	1
6B.2 (*)	G	1/4	1/4	1/2	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1/2	1/2
8B	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8

(*) Not provided on Multitec RO A

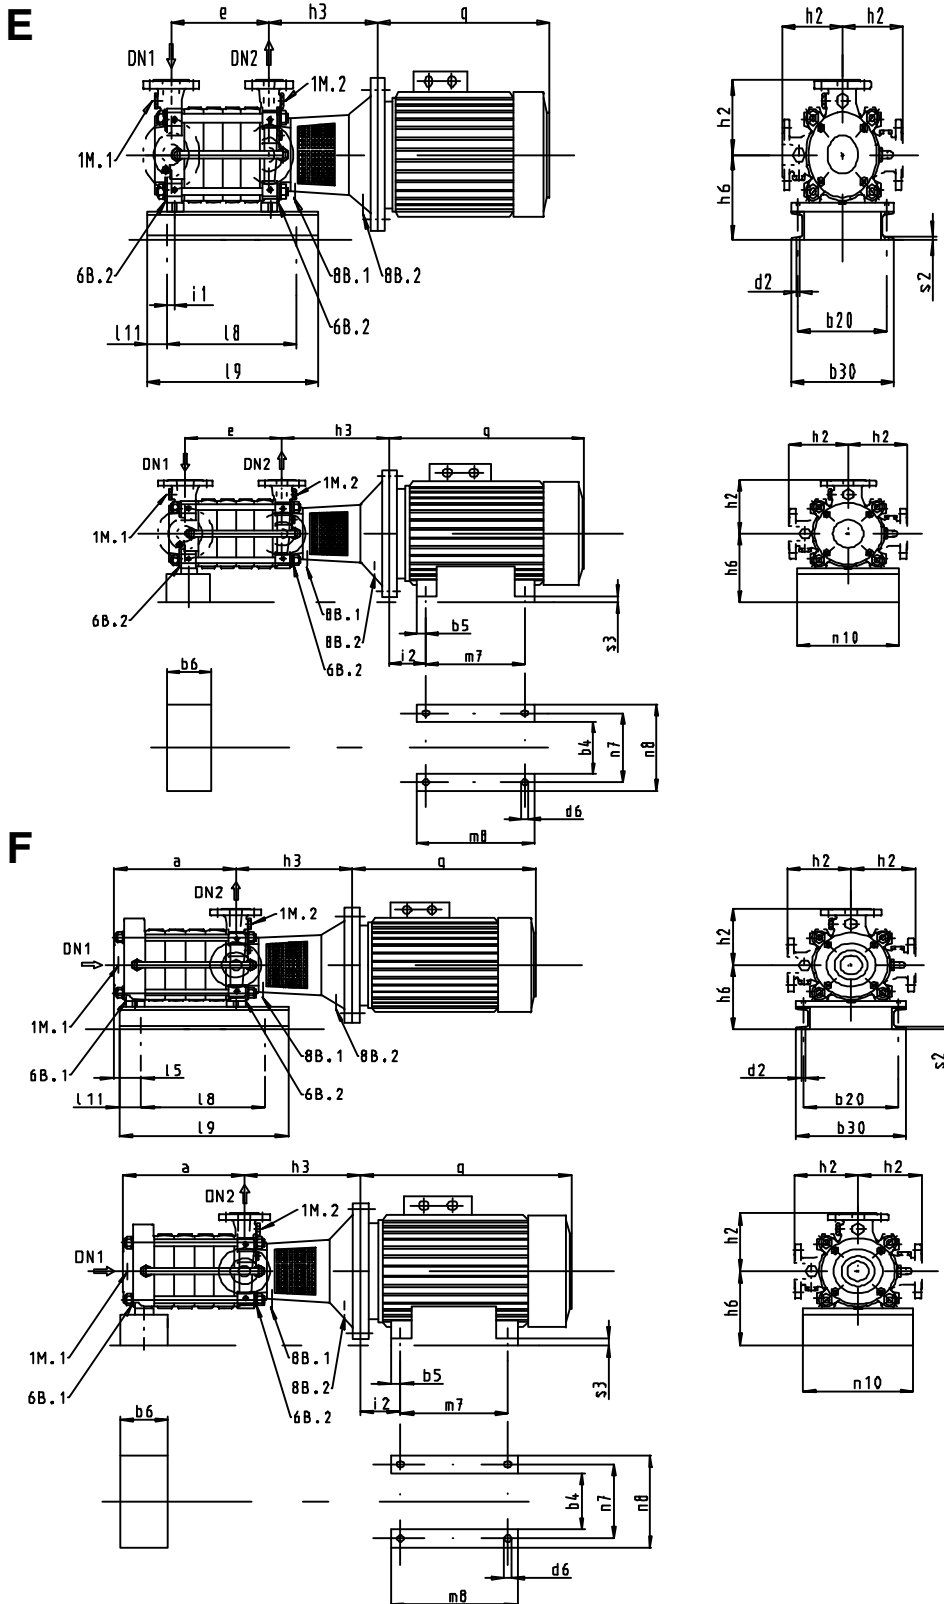Multitec E, F

Anschlüsse / Connections / Raccords / Attacchi / Aansluitingen / Conexiones

	G = ISO 228/1 Rp = ISO 7/1	Multitec E						Multitec F					
		32	50	65	100	125	150	32	50	65	100	125	150
1M.1	G	1/2	1/2	1/2	1/2	1/2	1/2	-	-	1/2	1/2	1/2	1
1M.2	G	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
6B.1	G	1/4	1/4	1/2	1/2	1/2	1	-	-	1/4	1/2	1/2	1/2
6B.2	G	1/4	1/4	1/2	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1/2	1/2
8B.1	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
8B.2	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8


Multitec E. F	1)	DN ₁		DN ₂	a	b ₂₀	b ₃₀	d ₂	e	h ₂	i ₁	l ₅	l ₈	l ₉	l ₁₁	n ₁₀	s ₂	mm
		axial	radial															
32	2	65	50	32	168	290	330	18	121	175	9	57	135	455	60	330	4	
	3	65	50	32	223	290	330	18	176	175	9	57	190	500	60	330	4	
	4	65	50	32	278	290	330	18	231	175	9	57	245	550	60	330	4	
	5	65	50	32	333	290	330	18	286	175	9	57	300	610	60	330	4	
	6	65	50	32	388	290	330	18	341	175	9	57	355	670	60	330	4	
50	2	100	80	50	190	290	330	18	151	200	18	57	190	500	60	330	4	
	3	100	80	50	252	290	330	18	213	200	18	57	245	550	60	330	4	
	4	100	80	50	314	290	330	18	275	200	18	57	300	610	60	330	4	
	5	100	80	50	376	290	330	18	337	200	18	57	355	670	60	330	4	
	6	100	80	50	438	290	330	18	399	200	18	57	410	730	60	330	4	
65	2	125	100	65	247	365	405	18	189	225	18	77	200	530	60	405	4	
	3	125	100	65	326	365	405	18	268	225	18	77	270	610	60	405	4	
	4	125	100	65	405	365	405	18	347	225	18	77	350	690	60	405	4	

1) Stufenzahl Number of stages Nombre d'étages Numero degli stadi Aantal trappen N° de etapas

MTC E and F 32-50-65 Table of variable dimensions for motors IP 55 50Hz 2-pole and 4-pole

Form	Motor / motor / Moteur / Motor / Motore / Motor			b ₆	d ₆	h ₃ MTC			h ₆ MTC			i ₂	m ₇	m ₈ 1)	n ₇ ¹⁾	n ₈ ¹⁾	n ₁₀ ¹⁾	q ¹⁾	s ₃ ¹⁾	mm			
	kW	Flange FF	IEC			32	50	65	32	50	65												
V1	2.2	215	100L	-	-	302	-	-	192	-	-	-	-	-	-	-	-	-	-	-			
	3	215	100L	-	-		-	-		-	-	-	-	-	-	-	-	-	-	-	-	313	
	4	215	112M	-	-		-	-		-	-	-	-	-	-	-	-	-	-	-	-	334	
	5.5	265	132S	-	-	322	329	-		210	-	-	-	-	-	-	-	-	-	-	-		
	7.5	265	132S	-	-		-	-			-	-	-	-	-	-	-	-	-	-	-	-	374
	11	300	160M	-	-	352	359	381			245	-	-	-	-	-	-	-	-	-	-	-	
	15	300	160M	-	-							-	-	-	-	-	-	-	-	-	-	-	-
	18.5	300	160L	-	-	-	-	-				-	-	-	-	-	-	-	-	-	-	-	-
	22	300	180M	-	-	-	-	-				-	-	-	-	-	-	-	-	-	-	-	-
	30	350	200L	-	-	-	-	-				-	-	-	-	-	-	-	-	-	-	-	-
37	350	200L	-	-	-	362	-	-	-			-	-	-	-	-	-	-	-	-	-	602	
B35	45	400	225M	140	19	-	-	384	-			-	225	149	286	361	356	428	240	667	24	-	
	55	500	250M	50	24	-	-	414	-			-	280	168	349	409	406	506	240	790	72	-	
	78	500	280S	50	24	-	-	-	-	-		280	190	368	479	457	557	240	865	42	-		

1) informationshalber / for information only! / A titre indicatif / para información / per informazione / ter informatie

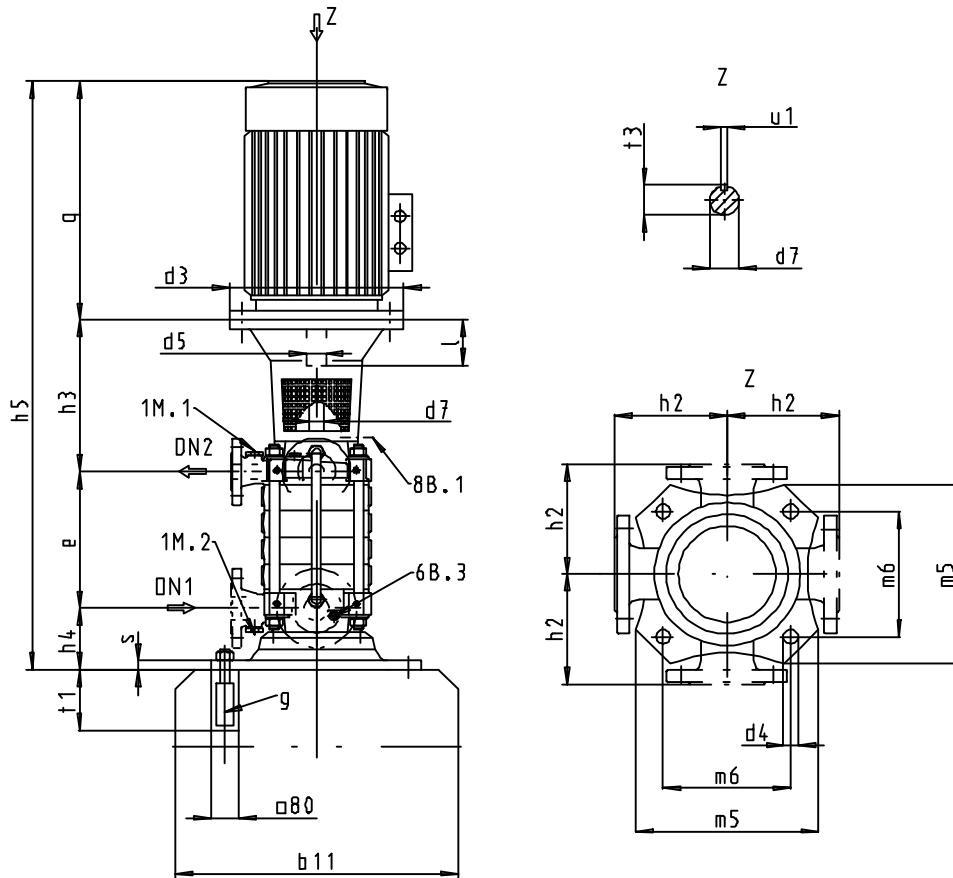Multitec V
V


MTC V	q	hs	IP55															IP23																	
			50 / 60 Hz						h ₃									50 / 60 Hz						h ₃											
			2-pole			4-pole			2-pole			4-pole			2-pole			4-pole			2-pole			4-pole			2-pole			4-pole					
kw	d ₃	d ₅	l	d ₃	d ₅	l	32	50	65	100	125	150	32	50	65	100	125	150	d ₃	d ₅	l	d ₃	d ₅	l	32	50	65	100	125	32	50	65	100	125	150
2,2	-	-	-	250	28	60	302	309	331	-	-	-	302	309	331	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3,0	250	28	60	250	28	60	302	309	331	-	-	-	302	309	331	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4,0	250	28	60	250	28	60	302	309	331	-	-	-	302	309	331	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5,5	300	38	80	300	38	80	322	329	351	-	-	-	322	329	351	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7,5	300	38	80	300	38	80	322	329	351	-	-	-	322	329	351	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
11,0	350	42	110	350	42	110	352	359	381	585	601	-	352	359	381	585	601	-	400	48	110	400	48	110	355	362	381	585	601	355	362	381	585	601	-
15,0	350	42	110	350	42	110	352	359	381	585	601	-	352	359	381	585	601	-	400	48	110	400	48	110	355	362	381	585	601	355	362	381	585	601	-
18,5	350	42	110	350	48	110	352	359	381	585	601	-	352	359	381	585	601	-	400	48	110	400	48	110	355	362	381	585	601	355	362	381	585	601	-
22,0	350	48	110	350	48	110	352	359	381	585	601	-	352	359	381	585	601	-	400	48	110	400	55	110	355	362	381	585	601	355	362	381	585	601	-
30,0	400	55	110	400	55	110	355	362	381	585	601	-	355	362	381	585	601	-	400	55	110	400	55	110	355	362	381	585	601	355	362	414	585	601	-
37,0	400	55	110	450	60	140	355	362	381	585	601	-	385	392	414	615	631	-	400	55	110	450	60	110	355	362	381	585	601	385	392	414	615	631	-
45,0	450	55	110	450	60	140	355	362	384	615	631	-	385	392	414	615	631	-	450	60	140	450	60	140	385	392	414	615	631	385	392	414	615	631	-
55,0	550	60	140	550	65	140	-	392	414	617	633	-	-	392	414	617	633	740	450	60	140	550	65	140	-	392	414	615	631	-	422	414	617	633	740
75,0	550	65	140	550	75	140	-	392	414	617	633	-	-	392	414	617	633	740	550	60	140	660	75	140	-	422	414	617	633	-	444	647	663	770	
90,0	550	65	140	550	75	140	-	392	414	617	633	-	-	392	414	617	633	740	660	65	140	660	75	140	-	-	444	647	663	-	444	647	663	770	
110,0	660	65	140	660	80	170	-	-	444	647	663	-	-	-	444	647	663	770	660	65	140	660	80	170	-	-	444	647	663	-	444	647	663	770	
132,0	660	65	140	660	80	170	-	-	444	647	663	-	-	-	444	647	663	770	660	65	140	660	80	170	-	-	444	647	663	-	444	647	663	770	
160,0	660	65	140	660	80	170	-	-	-	647	663	-	-	-	-	647	663	770	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
200,0	660	70	140	660	90	170	-	-	-	-	-	-	-	-	-	-	-	770	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

1) vom Fabrikat abhängig depends on motor brand en fonction de la marque di pendente dal costruttore afhankelijk van hec fabrikaat depeinde de la impresa costrutóra

Anschlüsse / Connections / Raccords / Attacchi / Aansluitingen / Conexiones

	G = ISO 228/1 Rp = ISO 7/1	Multitec V					
		32	50	65	100	125	150
1M.1	G	1/2	1/2	1/2	1/2	1/2	1/2
1M.2	G	1/2	1/2	1/2	1/2	1/2	1/2
6B.3	G	1/4	1/4	1/2	1/2	1/2	1
8B	Rp	3/8	3/8	3/8	3/8	3/8	3/8

MultitecV	1)	DN ₁	DN ₂	b ₁₁	d ₄	d ₇	e	g	h ₂	h ₄	m ₅	m ₆	s	t ₁	t ₃	u ₁
32	2	50	32	490	18	30	121	M16x250 MU	175	129	345	266	20	250	33	8
	3	50	32	490	18	30	176	M16x250 MU	175	129	345	266	20	250	33	8
	4	50	32	490	18	30	231	M16x250 MU	175	129	345	266	20	250	33	8
	5	50	32	490	18	30	286	M16x250 MU	175	129	345	266	20	250	33	8
	6	50	32	490	18	30	341	M16x250 MU	175	129	345	266	20	250	33	8
	7	50	32	490	18	30	396	M16x250 MU	175	129	345	266	20	250	33	8
	8	50	32	490	18	30	451	M16x250 MU	175	129	345	266	20	250	33	8
	9	50	32	490	18	30	506	M16x250 MU	175	129	345	266	20	250	33	8
	10	50	32	490	18	30	561	M16x250 MU	175	129	345	266	20	250	33	8
	11	50	32	490	18	30	616	M16x250 MU	175	129	345	266	20	250	33	8
	12	50	32	490	18	30	671	M16x250 MU	175	129	345	266	20	250	33	8
	13	50	32	490	18	30	726	M16x250 MU	175	129	345	266	20	250	33	8
	14	50	32	490	18	30	781	M16x250 MU	175	129	345	266	20	320	33	8
	50	2	80	50	490	18	30	151	M16x320 MU	200	136	345	266	20	320	33
3		80	50	490	18	30	213	M16x320 MU	200	136	345	266	20	320	33	8
4		80	50	490	18	30	275	M16x320 MU	200	136	345	266	20	320	33	8
5		80	50	490	18	30	337	M16x320 MU	200	136	345	266	20	320	33	8
6		80	50	490	18	30	399	M16x320 MU	200	136	345	266	20	320	33	8
7		80	50	490	18	30	461	M16x320 MU	200	136	345	266	20	320	33	8
8		80	50	490	18	30	523	M16x320 MU	200	136	345	266	20	320	33	8
9		80	50	490	18	30	585	M16x320 MU	200	136	345	266	20	320	33	8
10		80	50	490	18	30	647	M16x320 MU	200	136	345	266	20	320	33	8
11		80	50	490	18	30	709	M16x320 MU	200	136	345	266	20	320	33	8
12		80	50	490	18	30	771	M16x320 MU	200	136	345	266	20	320	33	8
13		80	50	490	18	30	833	M16x320 MU	200	136	345	266	20	320	33	8
14		80	50	490	18	30	895	M16x320 MU	200	136	345	266	20	320	33	8
15		80	50	490	18	30	957	M16x320 MU	200	136	345	266	20	320	33	8
65		2	100	65	540	18	35	189	M16x320 MU	225	170	400	304	22	320	38
	3	100	65	540	18	35	268	M16x320 MU	225	170	400	304	22	320	38	10
	4	100	65	540	18	35	347	M16x320 MU	225	170	400	304	22	320	38	10
	5	100	65	540	18	35	426	M16x320 MU	225	170	400	304	22	320	38	10
	6	100	65	540	18	35	505	M16x320 MU	225	170	400	304	22	320	38	10
	7	100	65	540	18	35	584	M16x320 MU	225	170	400	304	22	320	38	10
	8	100	65	540	18	35	663	M16x320 MU	225	170	400	304	22	320	38	10
	9	100	65	540	18	35	742	M16x320 MU	225	170	400	304	22	320	38	10
	10	100	65	540	18	35	821	M16x320 MU	225	170	400	304	22	320	38	10
	11	100	65	540	18	35	900	M16x320 MU	225	170	400	304	22	320	38	10
	100	2	125	100	690	33	40	233	M30x400 MU	275	212	545	405	30	400	43
3		125	100	690	33	40	323	M30x400 MU	275	212	545	405	30	400	43	12
4		125	100	690	33	40	413	M30x400 MU	275	212	545	405	30	400	43	12
5		125	100	690	33	40	503	M30x400 MU	275	212	545	405	30	400	43	12
6		125	100	690	33	40	593	M30x400 MU	275	212	545	405	30	400	43	12
7		125	100	690	33	40	683	M30x400 MU	275	212	545	405	30	400	43	12
8		125	100	690	33	40	773	M30x400 MU	275	212	545	405	30	400	43	12
9		125	100	690	33	40	863	M30x400 MU	275	212	545	405	30	400	43	12
10		125	100	690	33	40	953	M30x400 MU	275	212	545	405	30	400	43	12
11		125	100	690	33	40	1043	M30x400 MU	275	212	545	405	30	400	43	12
125		2	150	125	690	33	50	292	M30x400 MU	325	227	545	405	30	400	53,5
	3	150	125	690	33	50	404	M30x400 MU	325	227	545	405	30	400	53,5	14
	4	150	125	690	33	50	516	M30x400 MU	325	227	545	405	30	400	53,5	14
	5	150	125	690	33	50	628	M30x400 MU	325	227	545	405	30	400	53,5	14
	6	150	125	690	33	50	740	M30x400 MU	325	227	545	405	30	400	53,5	14
	7	150	125	690	33	50	852	M30x400 MU	325	227	545	405	30	400	53,5	14
	8	150	125	690	33	50	964	M30x400 MU	325	227	545	405	30	400	53,5	14
	150	2	200	150	750	33	60	338	M30x400 MU	400	250	600	430	30	400	64
3		200	150	750	33	60	470	M30x400 MU	400	250	600	430	30	400	64	18
4		200	150	750	33	60	602	M30x400 MU	400	250	600	430	30	400	64	18
5		200	150	750	33	60	734	M30x400 MU	400	250	600	430	30	400	64	18
6		200	150	750	33	60	866	M30x400 MU	400	250	600	430	30	400	64	18

1) Stufenzahl Number of stages Nombre d'étages Numero degli stadi Aantal trappen N° de etapas

Ursan Pompa Armatür ve Endüstriyel Ürünler San. Tic. Ltd. Sti.

Güzeller Mah. Bagdat Cad. No: 601/A 41400 Gebze / KOCAELI

Tel: (0.262) 642 05 60 - 641 84 15 - 641 82 60 **Fax:** (0.262) 642 39 79

e-mail: kocaeli@ksb.com.tr - ursan@ursanpompa.com

www.ursanpompa.com

